

# Energy efficiency practices: A case study analysis of innovative business models in buildings

Sergio Copiello<sup>\*</sup>, Edda Donati, Pietro Bonifaci

University IUAV of Venice, Dorsoduro 2206, 30123 Venice, Italy

## ARTICLE INFO

### Keywords:

Building energy efficiency  
Building retrofit supply chain  
Entrepreneurship  
Entrepreneurial approaches  
Business models  
One-stop shop (OSS)  
Energy performance contracting (EPC)

## ABSTRACT

Over the last two decades, the European Union has significantly improved its legal framework for building energy efficiency. New mandatory standards have led governments to adopt incentive measures that, in turn, encourage the growth of innovative entrepreneurial practices. This study analyzes emerging business models that capitalize on energy efficiency in the building industry. Thirty-seven energy efficiency projects – either retrofit or new construction, supported exclusively by innovative business models featuring the presence of an individual contractor – in five Central and Western European countries are considered. Data is collected on property characteristics, business environment, and energy efficiency measures. Using the Rough Set approach, the analysis identifies core attributes that associate or differentiate the case studies. They include building ownership, energy-related services to be provided to the users, and the duration for which the contractor must be involved. Additionally, other attributes – such as the types of retrofit work, investment costs, access to monetary incentives, and expected payback period – allow us to identify the cases representing best practices for each innovative model. There remain open questions concerning where the boundary between different business models lies and long-term economic self-sustainability, regardless of the availability of incentives.

## 1. Introduction

This study deals with a somewhat disregarded topic, namely, the role played by innovative business models (BMs) in pursuing building energy efficiency targets. The aim is to showcase the best practices in the European Union's (EU) energy policy framework, on which the remainder of this introductory section focuses along with the other underlying premises of the study. To that end, a case study analysis is performed, relying on a multi-attribute technique suited for dealing with complete or incomplete information, both quantitative and qualitative in nature. The methodology is further detailed in [Section 3](#), while [Section 4](#) presents the thirty-seven case studies identified across five Central and Western European countries and the data concerning three primary domains: property characteristics, entrepreneurial environment, and energy-related works. The innovative aspects of this work lie in the comprehensive examination of innovative BMs in the literature and an effort to identify their closest applications, as well as in the analysis of commonalities and distinguishing elements in those applications so as to cluster them according to various success levels.

### 1.1. Ten years and more of Directive 2010/31/EU on the energy performance of buildings

Energy efficiency in general – and building energy efficiency, specifically – is a current, prominent issue that started attracting attention many years ago [\[32,41\]](#). The oil shocks of the seventies raised awareness of the energy issue, with new regulations and standards adopted by several countries shortly after [\[30,31,46,87,120,127\]](#). While the focus was essentially on energy saving at the beginning, it later shifted to energy performance and energy efficiency of several sectors, including the building industry, bearing in mind environmental and climate impacts as well [\[33,121\]](#).

Concerning the EU, the recently adopted European Green Deal (EGD) (European [\[43,53\]](#)) sets a framework of long-term targets for the member countries and their economies, which imply structural changes in the energy, manufacturing, building, and transportation industries. A few meaningful keywords, such as climate neutrality and decarbonization regarding production and consumption processes, can describe those ambitious aims. While mainly covering environmental issues, the EGD has energy-side implications, especially on how energy is generated by

<sup>\*</sup> Corresponding author.

E-mail address: [sergio.copiello@iuav.it](mailto:sergio.copiello@iuav.it) (S. Copiello).

<https://doi.org/10.1016/j.enbuild.2024.114223>

Received 27 December 2023; Received in revised form 24 March 2024; Accepted 30 April 2024

Available online 1 May 2024

0378-7788/© 2024 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

different sources, how it is supplied to end-users, and how firms and households use it. Also, and more focused on the building industry, the recast of the Energy Performance of Buildings Directive (EPBD) will set stringent mandatory standards – meaning zero emission standards – for new buildings by 2030 and for existing ones by 2050. Besides, it sets a range of provisions to increase the renovation rate of existing buildings [76]. However, all this is not novel at all, as it represents the last step of a two-decade-long evolution in the regulatory framework, the previous milestones of which are Directive 2002/91/EC, its recast in Directive 2010/31/EU, and its amendment in Directive 2018/844/EU [79]. Especially, Directive 2010/31/EU includes substantial amendments to the 2002 Directive, which rest on three pillars. The first is the methodology to identify cost-optimal levels of building energy performance [9,68], encompassing the construction phase (upfront costs), operation phase (maintenance and management costs – energy costs and savings, especially), and disposal stage (disposal costs or residual value). It builds on the inverse relationship between construction cost and operating cost while trying to improve the energy performance: the former is bound to increase, and the latter is likely to decrease, so the total cost is expected to show a somewhat parabolic shape. Therefore, allowing for the comparison of different energy measure packages, the methodology leads to identifying a cost-optimal area encompassing those measures that maximize the energy performance and minimize the global cost in the building life cycle [131]. The second pillar refers to the concept of minimum energy performance requirements to be established for new and existing buildings, in the case of large renovation of building units and elements, and for the installation, replacement, or upgrade of systems [130]. The third pillar – although significant differences among the EU member countries characterize its implementation [77] – paves the way for further strengthening the mandatory certification system of building energy performance, which is meant to stimulate transparency in the building industry and the real estate market [4].

### 1.2. Incentive policies and measures

Overall, the contents of the regulations mentioned above have been implemented by EU countries and translated into a variety of command-and-control tools at first, but mostly incentive policies and measures later. As the players deal with several market barriers and information asymmetries in the implementation of building retrofit, incentives play a significant role in overcoming them [2,24,63,108].

Building on a wide corpus of studies [61,62,116,123] – and complementing them with the information in the *Odyssee-Mure* database,<sup>1</sup> below is a tentative classification of the policies adopted in the EU countries (Fig. 1). Aside from the energy performance certificates and other regulatory instruments such as building codes and standards, three main clusters are as follows: financial incentives [44,82,83,110], both direct, such as grants and subsidies, and indirect, as tax rebates [6,21,20,124]; in-kind incentives, such as tradable assets and securities [15]; behavioral incentives [59], namely, behavioral stimuli and knowledge transfer [10]. Besides, the literature identifies a variety of innovative tools proposed by private financial institutions, including on-bill finance and energy-efficient mortgages, which have the potential to reduce the need for government subsidies and simultaneously open up additional private sources of funding for renovations. Especially, energy-efficient mortgages can apply to both new construction and extensive refurbishment projects due to features such as long repayment periods and low interest rates. The literature has already suggested classifications of energy incentive policies [13,35]. One of these distinguishes the financial instruments in non-repayable rewards, debt financing, and equity financing, also clustering them according to their degree of innovativeness [12,14]. It is worth noticing that the first two

clusters identified here are elsewhere denoted as price instruments or economic incentive instruments [82,110]. At the same time, the third cluster is referred to as information instruments or information, education, and training measures [10,35].

### 1.3. Underlying hypothesis of this study

The hypothesis underlying this study is that the innovations in the regulation and the related incentive-focused policies and measures have led, in turn, to the birth and rise of innovative entrepreneurial models for sustainable buildings [28,39,58]. Those models are explicitly meant to exploit the business opportunities – and their effects on revenue generation and profit growth – offered by the tools designed to stimulate the green transition (Fig. 2).

Under the framework above, this work lies on the assumption that further developments of those innovative entrepreneurial models [27,54] are required to pursue the goals set in the EGD [53,121,128], especially to double the building renovation rate by 2030 [7,104], as stated in the priority topics of the European Climate Pact. The research questions we address here can be expressed as follows. What lesson can we learn from the innovative entrepreneurial approaches and BMs developed in the building industry during the last decade? What are likely to be identified as the success factors and the most successful models, which thus can be regarded as best practices? This study tries to answer these questions by examining 37 case studies across five Central and Western European countries: Belgium, France, Germany, Spain, and The Netherlands. Collected data refers to three domains: the property subject to refurbishment, the works meant to improve energy performance, and the entrepreneurial environment. Land and building characteristics are considered to describe the property, along with information concerning the ownership status. All the works related to thermal insulation, heating and cooling systems, windows and frames, mechanical extract ventilation systems, and renewable energy sources are analyzed as far as improving energy performance is concerned. The entrepreneurial environment variables account for the adopted BM, the involved public and private players, and the relationships they establish. Data is processed using the multidimensional approach of the Rough Set Theory, which allows for the identification of a series of somewhat vague and partly overlapping clusters according to the primary characteristics of the case studies.

## 2. Literature review

In this section, a perusal of the literature is presented. The review is divided into four parts. First, we deal with the broad definition of BMs, as found in studies related to the building industry. Secondly, we focus on characterizing the BMs meant explicitly to pursue sustainability goals. Thirdly, we turn to some specific BMs whose adoption has been stimulated by the Directives on building energy performance and the related incentive policies and measures. Lastly, we address the different risk allocation profiles of those BMs.

### 2.1. Cornerstones of a business model

According to the Cambridge Business English Dictionary [29], a BM is “a description of the different parts of a business or organization showing how they will work together successfully to make money.” Therefore, it can also be described as the plan – or the intangible medium, if you will – by which a company promotes its products and services to reach the target customers and, more broadly, the reference community [132].

Based on previous studies [8,78,91,118,134], a review focusing on the development of sustainable BM archetypes [19] identifies three cornerstones of each BM: value proposition, value creation and delivery, and value capture (Fig. 3). Value proposition refers to the reasons why a company introduces and uses a specific entrepreneurial organization to

<sup>1</sup> See: <https://www.measures.odyssee-mure.eu/policy-mapper-efficiency-tool.html/> (accessed 31.07.2023).

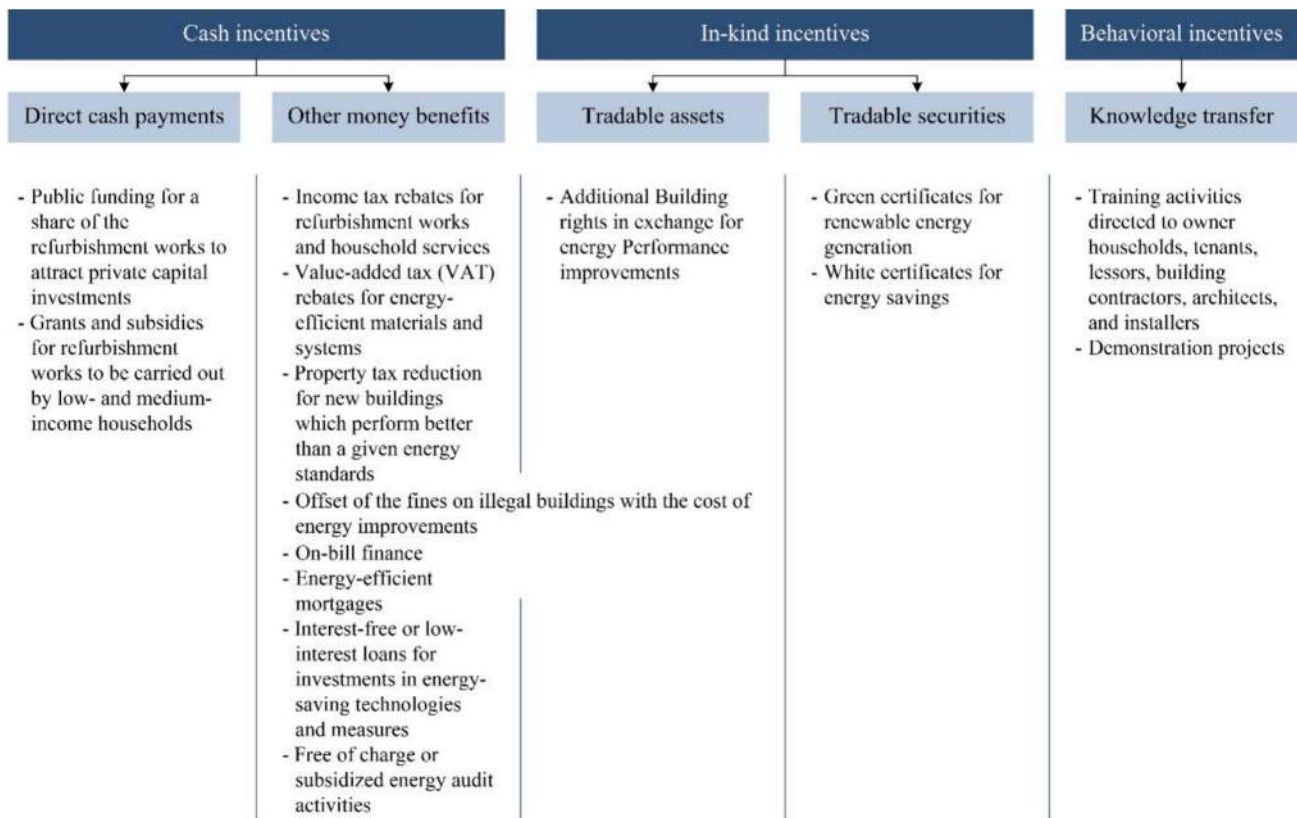


Fig. 1. A tentative classification of incentive tools and measures.

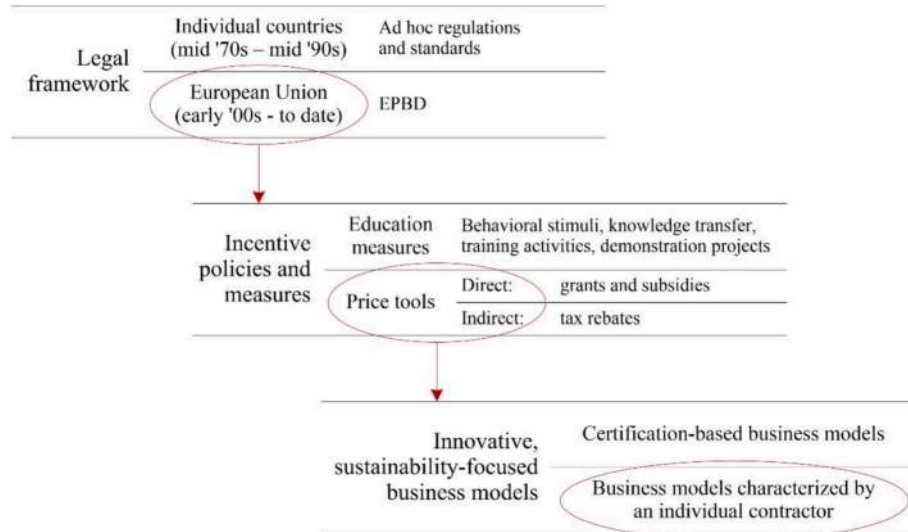


Fig. 2. Underlying premise: legal framework, incentive policies and measures, innovative business models.

produce its goods and services, mainly including the benefits it can deliver to the users, ensuring at the same time an adequate balance between costs and revenues to pursue the goal of profit maximization. The second element – value creation and delivery – involves all the procedures that support production and sales – such as order processing and fulfillment, inventory management, customer support, and so forth – to meet customers' expectations in terms of need satisfaction as well as business owners' expectations in terms of profit-making. The third element – value capture – means how the value generated is translated into revenue streams and later retained by the company or redistributed

to the shareholders.

It is worth mentioning that other studies divide some key aspects into distinct subsets (Fig. 3). For instance, the second element – namely, value creation and delivery – is sometimes referred to as the supply chain on the one hand and customer interface on the other hand [25]. That means drawing a line between the relationships established with the supplier and the relationships that involve the customers [23,132]. In addition, the third element – that is, value capture – can be clustered into two activities: financial modeling is the former, and governance modeling is the latter [25].

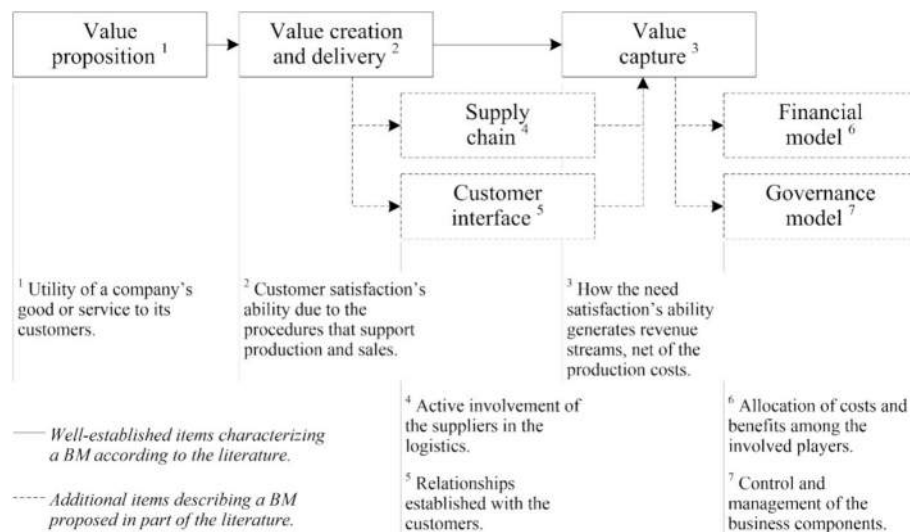


Fig. 3. Cornerstones of a business model.

## 2.2. Sustainability-focused business models

A BM focused on sustainability issues can be distinguished from a generic one according to three crucial aspects: the intended goal, the value creation process and outcomes, and the involved players. Taking for granted that profit maximization is the aim of all entrepreneurial ventures, the will to reduce and mitigate (at least some of) the negative impacts on the environment and society characterizes only a subset of them [74,75,133]. While value creation is the ability to make money from the products brought to market, in a sustainability-focused BM, it also implies manufacturing goods with longer life cycles and lower negative externalities [132]. Lastly, taking a sustainability view entails adopting longer production chains [19,89,122,133] where the relationships with and among the stakeholders are reshaped, shifting from a traditional unidirectional structure to a circular and open format [42], and a greater exchange of information and knowledge between the players occurs [5,132]. The literature classifies the BMs committed to sustainability based on technological, social, and organizational aspects [19]. Technological-driven sustainable BMs focus on maximizing material and energy efficiency, renewable energy use, and value creation from waste.

## 2.3. The One-stop shop, energy performance contracting, (Managed) energy services agreement, and other business models

This subsection deals with some sustainability-focused BMs; the primary three of them are as follows: One-stop shop (OSS), Energy performance contracting (EPC), and (Managed) energy services agreement (MESA). They all share the value proposition, namely, enabling building energy refurbishment by providing a comprehensive bundle of related goods and services so that the customers can experience lower energy bills as well as more livable, more comfortable, and healthier housing. They rather differ in aspects of customer interface as far as value creation and delivery are concerned and revenue streams in the financial model as far as value capture is concerned (Table 1).

One-stop shop (OSS) is a common locution in several fields. It is used to mean the integrated offer of products, services, or solutions by a private entity to its customers or by a public body to its users. It identifies a BM making its way into the building industry, too, especially for refurbishment works, as the adoption of the Directives on the Energy Performance of Buildings has favored it. The distinguishing feature of the OSS BM (Fig. 4) is the presence of an individual contractor who performs the following tasks: interacts with the customers to fulfill their needs; provides them with the information required to define the project


and carry out the work; identifies the suppliers of specific goods and services, including financial services; takes care of the payment flows; bears the responsibility for discrepancies between expected and actual results [12,14,25]. The boundaries of the contractor action include establishing relationships with a few consultants, which support the customers in the planning process, the financing decisions, and the energy audit [12,14,22]. Cases and applications of public-driven and private-driven OSS [94] have been identified in the Scandinavian countries [80] and in Western European countries [7,73], especially France and Belgium [37]. Recent studies show that the acceptance of the OSS BM is likely to grow according to the age, education level, and income level of the prospective customers [18,80,93].

A BM derived from the OSS one features the presence of a private partner – mostly an Energy Service Company (ESCO) – playing the role of the individual contractor [3,48,117,125]. The ESCO is responsible for the energy performance of those works and provides guarantees to the customers. The contractor then recovers capital expenditure by directly benefiting from energy saving, representing its primary income flow [72,92]. The costs and energy savings allocation among the involved parties may change based on the agreed energy service contract [65,81,85]. Concerning the latter, it is usually shaped according to different financial models: Energy performance contracting (EPC) [26,47,72,109,119] (Fig. 4) and Energy supply contracting (ESC) [26,47,114], the first of which is the most commonly used in the building industry. Depending on the energy-saving distribution and risk allocation, the literature identifies four EPC contract subtypes: guaranteed saving, shared saving, without guaranteed savings, and the so-called *chauffage* one [72,81,117]. The topic of ESCOs requires some clarification. The establishment and rise of these entities predate the incentive measures discussed here, and their functioning is sizably independent of public subsidies [16,11]. Additionally, ESCOs employing the EPC BM only focus on renovating buildings, particularly large public ones, and primarily carry out projects likely to generate a return on investment in the short to medium term.

When the relationships between the involved parties – particularly between customers and the contractor – are regulated under the ESC framework, another class of sub-models can be recognized. In order to identify it, the literature uses the acronym (M)ESA, which stands for (Managed) energy services agreement [25,26,36]. The (M)ESA BM combines the responsibility born by the contractor – usually an ESCO, again – for the energy performance of the works with an energy supply contract. Furthermore, it often features the establishment of a special purpose vehicle [17]; thus, a legal entity where the subcontractors can be involved and that plays as the interface for the customers [60] or, put

**Table 1**  
Key features of three sustainability-focused business models.

|                                    | OSS BM                                                                                                                                                                                                                             | EPC BM                                                                                                                                                                                                                | (M)ESA BM                                                                                                                                                    |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Value proposition</i>           | Enabling building energy refurbishment by providing a comprehensive bundle of related goods and services so that the customers can experience lower energy bills as well as more livable, more comfortable, and healthier housing. |                                                                                                                                                                                                                       |                                                                                                                                                              |
| <i>Value creation and delivery</i> | <i>Supply chain</i>                                                                                                                                                                                                                | The company handles all the relationships with the suppliers of intermediate goods and services.                                                                                                                      | The company handles all the relationships with partners, financiers, and suppliers of intermediate goods and services.                                       |
|                                    | <i>Customer interface</i>                                                                                                                                                                                                          | The customers are provided with energy consultancy and auditing services, refurbishment works, and energy-efficient installations.                                                                                    | The customers are supplied with retrofit measures and performance guarantees, often with energy management and monitoring services, occasionally with loans. |
|                                    | <i>Financial model</i>                                                                                                                                                                                                             | Upfront costs are offset by means of public funds when available and money borrowed from lenders.<br>The customers pay for the goods and services provided as work progresses. Customers benefit from energy savings. | The revenue streams are based on energy savings allocated between the contractor and the customers.                                                          |
| <i>Value capture</i>               | The revenue streams are based on energy savings, which are allocated between the contractor and the customers, and energy selling.                                                                                                 |                                                                                                                                                                                                                       |                                                                                                                                                              |
| <i>Governance model</i>            | The contractor and its partners may establish a special purpose entity.                                                                                                                                                            |                                                                                                                                                                                                                       |                                                                                                                                                              |

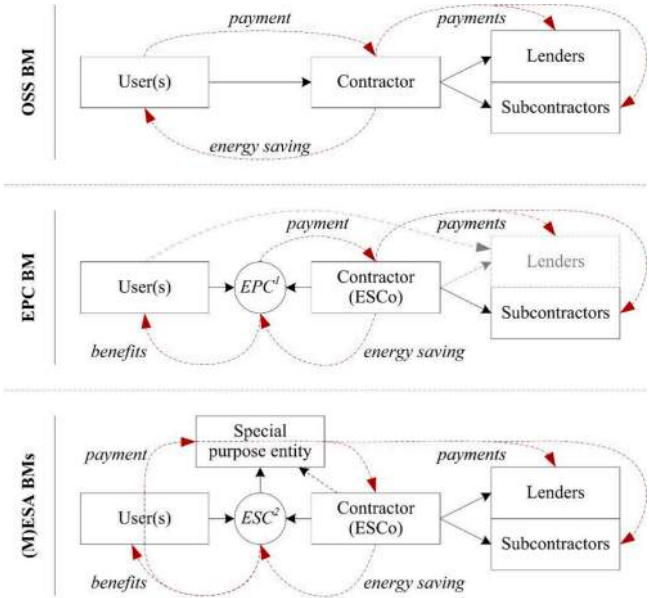

<sup>1</sup> Energy performance contract; <sup>2</sup> Energy supply/service contract.

**Fig. 4.** Comparison between OSS, EPC, and (M)ESA BMs concerning the players' arrangement and relationships.

differently, a subsidiary of the contractor that is useful to perform separate transactions with subcontractors and customers (Fig. 4) as well as isolate financial risk. Concerning the latter aspect, it seems straightforward to identify a resemblance with the so-called risk-fence role played by the special purpose vehicles in public-private partnerships. Though primarily used for the energy retrofit of commercial buildings and public properties, a few large-scale interventions in the residential sector are reported across Central and Western European countries, signally for social housing [25].

The recent literature identifies almost a dozen more BMs focusing on building energy efficiency [25,26,109,119]; among the others, it deserves mentioning the Turnkey contract (TKC) BM [56,86,90]. The term turnkey refers to a contract wherein an individual contractor pre-arranges all the necessary resources – premises, equipment, supplies, and so forth – to bring a project – of a facility, building, or-plant – to a fully operational state [84]. This definition closely resembles the distinguishing feature of the OSS BM; besides, turnkey solutions can be embedded in EPC-like BMs [69]. Nonetheless, there are a few differences that are worth bearing in mind. Firstly, while the OSS BM is specially meant to deal with renovation, refurbishment, and retrofit, the TKC BM is mainly adopted in new construction projects and does not include subsequent maintenance. Secondly, in the OSS BM, professional advisors assist the customers to ensure that the planned works best suit their needs; instead, in the TKC BM, the customers only set the required output and the expected performance, while the contractor is fully responsible for design development and implementation. Lastly, TKCs are usually awarded following a call for tenders. Once awarded the contract, the contractor must appoint a project manager who acts as the interface with the subcontractors and customers. Payments for TKCs are most likely to occur on a lump-sum basis or as work progresses, and the work must be carried out by a fixed deadline.

2.4. Risk allocation profile of the sustainability-focused business models

Aside from the commonalities and dissimilarities described above, the various classes of BMs are characterized by subtle differences in risk allocation. While supply risk – namely, risk-bearing as far as the retrofit or new construction works are concerned – usually lays on the shoulders of the contractor, demand risk – that is to say, risk-bearing as far as

energy management and consumption are concerned – is sometimes shared – in part, at least – between customers and the contractor [52,70,126] (Fig. 5). In the OSS BM, the customers benefit from energy saving and – separately – make payment(s) to the contractor. Thus, the saving (as inflow for the customers) and the price (as outflow from the same customers) are not interlinked. –ontrariwise, in the E-C and (M) ESA BMs, t-e repayment for the contractor directly stems from the savings achieved with the energy retrofit works. Hence, increasing performance and achieving a high level of energy saving is crucial as the contractor's gain depends on them.

### 3. Method

We aim to find out the best practices among a few dozen case studies described by variables belonging to several domains. As those variables are both quantitative and qualitative, as they are an incomplete characterization and representation of the case studies, and as they sometimes include imprecise, vague, or even noisy information, we find it profitable to process the data using Rough Set (RS) Theory, which was introduced by Polish mathematician Z. Pawlak in 1982 [95,98–99,100,113]. Therefore, we can roughly describe the class of best practices and the other groups of case studies, where the approximation comes from considering and investigating a complex phenomenon and also dealing with imperfect information and missing data [49,67].

Objects and attributes are the two essential elements of an information system, which can be represented using a table where the former ones are positioned in the rows and the latter ones in the columns. Let us denote a generic object by  $x$  and the set of attributes used to describe it in the information system by  $A$ . Row-column intersections of the table mentioned above feature the values  $a(x)$  taken by each object for each attribute. A rough set of the analyzed objects can be defined by identifying two other sets, the lower and upper approximation, respectively, of the rough set itself.

Let us suppose that, based on their attributes, the two objects  $x$  and  $y$  belong with certainty to a group, for instance, because they share the same value for all those  $A$  attributes. To paraphrase the words of Z. Pawlak, those objects are indiscernible – or indistinguishable, if you will – and bound in an indissoluble relationship as they share the very same information for the same set of attributes [95–96]. The indiscernibility relation  $xI(A)y$  is, hence, one of the key concepts in RS Theory. It can be used to identify the lower approximation set  $\underline{P}X$ :

$$\underline{P}X = \{x | [x]_P \subseteq X\} \quad (1)$$

Let us also assume that a few other objects may or may not belong to that collection, as they share the same values for some attributes but not all. Uncertainty is another crucial concept in RS Theory, which refers to the inability to define whether or not an object is included in a set: it might,

according to part of the attributes, or it might not, according to other features. It can be used to identify the upper approximation set  $\overline{P}X$ :

$$\overline{P}X = \{x | [x]_P \cap X \neq \emptyset\} \quad (2)$$

Here, we consider both the lower- and upper-approximation set to be crisp – or conventional, if you will – as in the standard RS theory version [96]. The difference  $\overline{P}X - \underline{P}X$  identifies the so-called boundary region [97]. In other words, on the one hand, the lower-approximation set includes all the objects that belong to the rough set with a probability equal to 1 while, on the other hand, the upper-approximation set includes the objects that belong to the rough set with a non-zero probability (Fig. 6).

Let us denote the ratio between the number of elements in lower- and upper-approximation sets by  $\alpha_P(X)$  [96], which is also a measure of the accuracy of the set representation:

$$\alpha_P(X) = \underline{P}X / \overline{P}X \quad (3)$$

with  $0 \leq \alpha_P(X) \leq 1$ . If  $\overline{P}X = \underline{P}X$ , then the upper-approximation set and the lower-approximation set include the same objects, the boundary region is empty, and  $\alpha_P(X) = 1$ ; hence, there is a perfect approximation. Usually, the number of objects that indeed belong to the set ( $\underline{P}X$ ) is lower than the number of those that possibly belong to it ( $\overline{P}X$ ), which means  $0 \leq \alpha_P(X) < 1$ , and the set is roughly definable, so it is essentially vague.

RS analysis has been applied primarily in engineering, computer, and medical sciences; later, it has also made its way into other research fields, such as urban planning and building energy efficiency. In addition, RS and its extensions are often associated with the twofold purpose of multiple-criteria decision-making and multiple-criteria decision support: to explain decisions as far as the underlying circumstances and

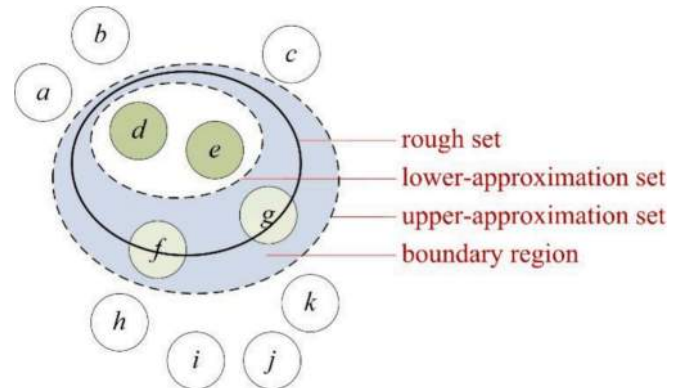


Fig. 6. Representation of a rough set.

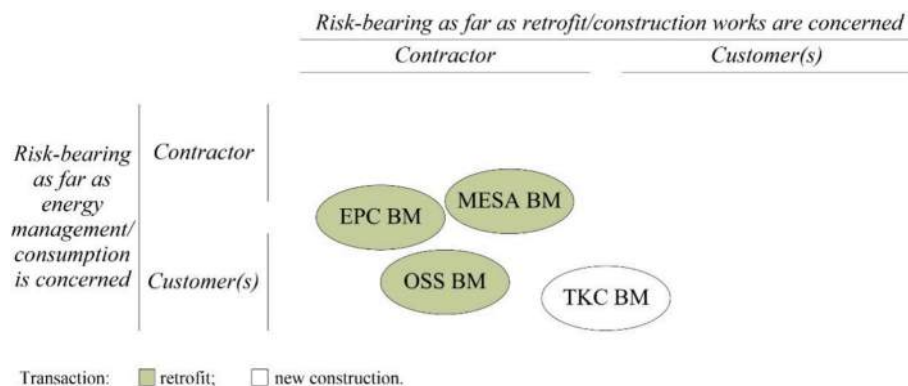


Fig. 5. Comparison between OSS, EPC, (M)ESA, and TKC BMs concerning risk allocation.

determinants are concerned and to recommend how a decision should be made given specific circumstances [50–51,112].

Concerning urban planning, a study focusing on a multi-actor approach for projects involving the use and revitalization of Dutch urban land [88] is worth mentioning. RS analysis is applied to case studies of urban development plans involving public–private partnership (PPP) transactions, aiming to identify the key drivers of the success or failure. Various kinds of PPP forms are also analyzed in a publication on the characterization of urban models in Italy [115]. Another work in urban planning tackles the issue of waste-to-energy plants' and landfills' locations [1], compared based on several demographic and environmental attributes.

Regarding building energy efficiency, RS has been used in a few studies to improve energy consumption monitoring and energy efficiency prediction in buildings supplied with district heating [64], to examine conflicts amongst objectives in green buildings projects [111], to identify the success factors of energy-efficient social housing built or refurbished through a PPP scheme [31], for the automatic reconfiguration of photovoltaic systems in the attempt to minimize the adverse effects of shading and, thus, maximize their performance [38], to perform a reduction of redundant variables influencing building energy consumption so as to reveal the critical factors [71].

The analysis below is performed using the software ROSE2 [105,106], developed by the IDSS (Intelligent Decision Support Systems) Laboratory at the Poznan University of Technology. It features a package for “rule induction” based on RS Theory – essentially a sorting and classification technique – which requires distinguishing between condition attributes ( $A^C$ ) and decision (or evaluation) attributes ( $A^D$ ) [101]. An analogy can be established with statistical analysis, with each  $A^C$  playing the role of independent variables, while each  $A^D$  represents a dependent variable, even though the distinction between condition and decision attributes does not always imply a causal relationship. Examples of rules are as follows:

$$(A_1^C = a_p) \wedge (A_2^C = a_q) \wedge (A_3^C = a_r) \Rightarrow (A_1^D = a_t), \{x_i, x_j\} \quad (4)$$

$$(A_1^C = a_p) \wedge (A_3^C = a_r \vee a_s) \Rightarrow (A_1^D = a_t), \{x_i, x_j, x_k, x_l\} \quad (5)$$

Hence, if the first three condition attributes  $A_1^C$ ,  $A_2^C$ , and  $A_3^C$  take on the values  $a_p$ ,  $a_q$ , and  $a_r$ , respectively, then we can expect the first decision attribute  $A_1^D$  to be equal to a given value  $a_t$ , and the two objects  $x_i$  and  $x_j$  are included in the set. Also, if the value of the first condition attribute  $A_1^C$  is  $a_p$  and the third decision attribute alternatively takes on the two values  $a_r$  and  $a_s$ , then the first decision attribute  $A_1^D$  is equal to  $a_t$ , and the four objects  $x_i$ ,  $x_j$ ,  $x_k$ , and  $x_l$  are included in the set. It is straightforward to see the resemblance between the rules in Eqs. (4)–(5) and the definition of lower- and upper-approximation sets as in previous Eqs. (1)–(2).

#### 4. Case studies

Below is a workflow diagram describing the steps of the case study analysis and their respective inputs and outputs (Fig. 7). Projects of energy retrofit or new energy-efficient constructions carried out using innovative business models are identified using a wide range of sources: reports and deliverables drafted under the framework of EU-funded projects (for instance, STUNNING<sup>2</sup> – SusTainable bUsiNess models for the deep ositive en of buiLdInGs, BEEM-UP<sup>3</sup> – Building Energy Efficiency for Massive market Uptake, E2REBUILD<sup>4</sup> – Industrialized energy efficient retrofiting of resident buildings in cold climates, and EXCESS<sup>5</sup> –

ositive user-Centric Energy ositive houseS); research articles [40,57,102,103], conference papers [45,55,107], and book chapters [66]; technical reports concerning projects, construction site activities, and energy audits; information sheets published by industry monitors; online collaborative platforms and open information portals aimed at collecting and sharing information on sustainable building projects. Data is collected concerning 37 case studies across five Central and Western European countries: Belgium, France, Germany, Spain, and The Netherlands (Fig. 8, Table 2). It is observed that most case studies are located in regions with Continental and Atlantic climates, while only few cases fall under the Mediterranean climate zone. This variation in climate zones is reflected in the primary use of different building materials, such as reinforced concrete for the Continental climate and bricks for the Atlantic one. Besides, differences arise concerning the building typology. The Belgian, Dutch, and German cases include uses other than residential. Apartment buildings are ordinary in the French and German cases. Most cases consist of multi-family buildings, while terraced, semi-detached, and detached houses are rare.

The information gathered for each case study can be clustered into three domains (Table 3): characteristics of the adopted BM, features of the properties where energy-efficiency measures are taken, and aspects of the performed efficiency-related works.

The first domain includes data concerning the kind of BM used, the public or private nature of the property ownership, the type of project developer, whether or not other players are involved, whether incentive measures such as subsidies and tax rebates are used, type and duration of the works, and amount of the investment.

OSS and TKC are the most represented BMs, while the (M)ESA one is absent in the analyzed case studies. The EPC BM is predominant when private non-profit building owners appoint consulting firms as project developers (Fig. 9). Incidentally, in some cases, the specific BM setting deviates slightly from expectations. For instance, in a couple of them, a consortium of contractors or several contractors are appointed simultaneously instead of an individual contractor and multiple sub-contractors. Nonetheless, some distinctive features of the analyzed BMs can still be recognized. Also, two critical players are essentially missing: ESCos, as far as contractors and project developers are concerned, and energy suppliers, about subcontractors. Even though ESCos are largely underrepresented, there are a few cases where consultancy firms play similar roles, at least concerning the energy-related activities needed to carry out the project. Investment costs vary between a minimum of 30 thousand and a maximum of nearly 60 million Euros; the average investment is 7 million, while the median equals 3.2 million Euros. Unit investment costs are often in the ranges of 300 to 650 Euro/m<sup>2</sup> (27 % of the case studies), 650 to 900 Euro/m<sup>2</sup> (14 %), 1,000 to 1,550 Euro/m<sup>2</sup> (30 %), and 2,000 to 2,900 Euro/m<sup>2</sup> (16 %), with the highest unit cost reaching 3,390 Euro/m<sup>2</sup>. Economic incentives are used in about half the cases (18 out of 37), but the actual amount of public funds is available only for a part of them (11 out of 18). Average subsidies are equal to 1.3 million Euros, with a median value of 644 thousand Euros. In a demonstration project, grants cover up to 98 % of the investment, but they mostly range between 5 % and 43 %. Two additional variables are considered and used as decision attributes in the analysis, along with BM and the use of incentives. They are as follows: allocation of the energy savings between ownership and developer and expected payback period,<sup>6</sup> although data is often missing, as the information about savings allocation and the payback period is unknown for several case studies.

The second domain is meant to provide an overview of the leading property features: its size, meaning the net floor area, the construction year, the building typology and construction materials, both the energy

<sup>2</sup> See: <https://renovation-hub.eu/> (accessed 09.08.2023).

<sup>3</sup> See: <https://cordis.europa.eu/project/id/260039> (accessed 09.08.2023).

<sup>4</sup> See: <https://cordis.europa.eu/project/id/260058> (accessed 09.08.2023).

<sup>5</sup> See: <https://positive-energy-buildings.eu/> (accessed 09.08.2023).

<sup>6</sup> The available data refers to the simple payback period; hence, merely the ratio between savings and investment costs (net of capital grants). Considering the discounted payback period – thus accounting for the time value of money – would lead to higher payback values.

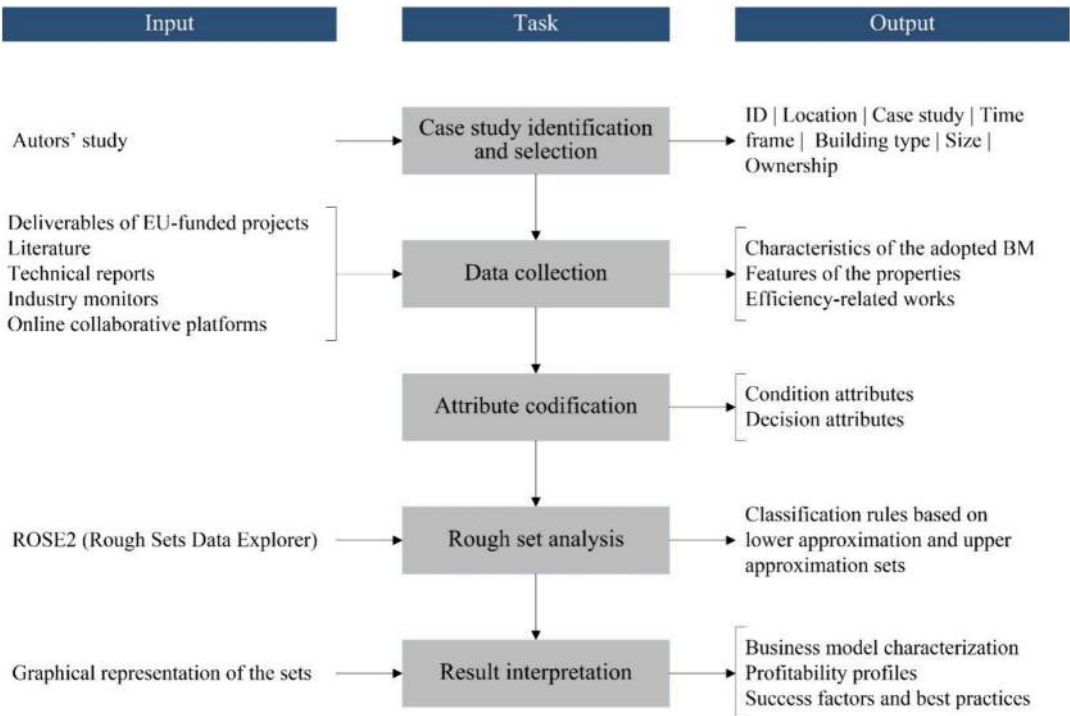


Fig. 7. Case study analysis workflow diagram.

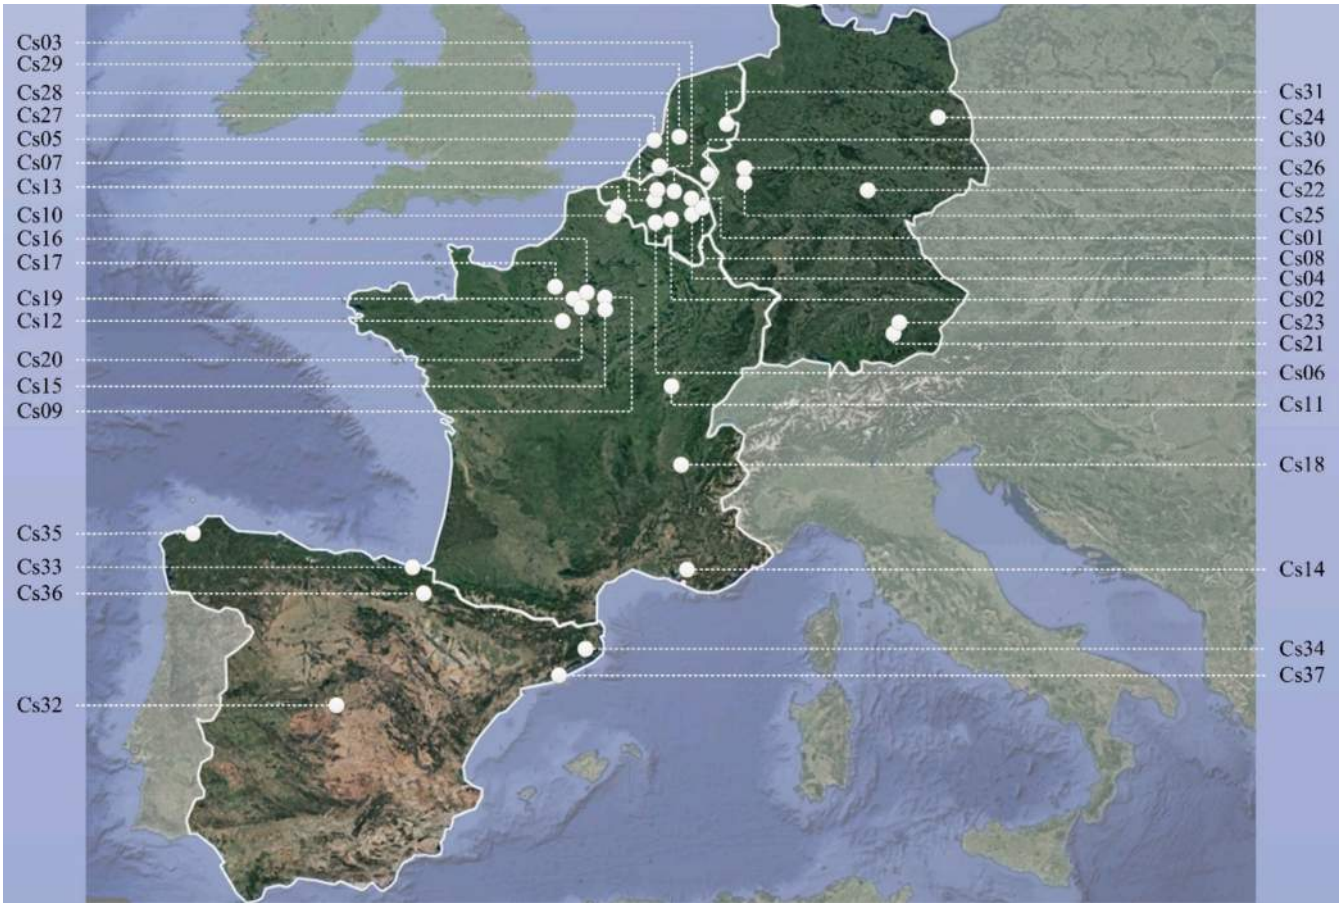


Fig. 8. Location of the case studies.

**Table 2**  
Main features of the case studies.

| ID   | Location                   | Case study                               | Time frame | Building type        | Size (m <sup>2</sup> ) | Ownership                                                                              |
|------|----------------------------|------------------------------------------|------------|----------------------|------------------------|----------------------------------------------------------------------------------------|
| Cs01 | Hoeselt (BE)               | De Sociale Energiesprong                 | 2021       | Semi-detached        | 445                    | Cordium (social housing company)                                                       |
| Cs02 | Namur (BE)                 | Nouveau Centre Perex                     | 2017–19    | Office building      | 7,884                  | SPW Mobilité et Infrastructures                                                        |
| Cs03 | Averborde (BE)             | Uitgeverij Averbode                      | 2013–14    | Office and warehouse | 5,800                  | Uitgeverij Averbode                                                                    |
| Cs04 | Liège (BE)                 | Uliège Institute of Botany               | 2015–19    | University building  | 9,000                  | Université de Liège                                                                    |
| Cs05 | Bruxelles (BE)             | Rue Belliard, 65                         | 2014–18    | Office building      | 5,134                  | AXA REIM Belgium                                                                       |
| Cs06 | Charleroi (BE)             | Cité du Centenaire                       | 2016–17    | Multi-family         | 3,420                  | La Sambrienne (public housing company)                                                 |
| Cs07 | Bruxelles (BE)             | Avenue Louise, 120                       | 2010–12    | Office building      | 2,948                  | Gilt Investments                                                                       |
| Cs08 | Herstal (BE)               | Pivert II                                | 2016–18    | Multi-family         | 7,510                  | Société Régionale du Logement de Herstal                                               |
| Cs09 | Paris (FR)                 | Cotentin Falguière                       | 2013–14    | Multi-family         | 3,338                  | ICF Habitat (part of SNCF Immobilier)                                                  |
| Cs10 | Hem (FR)                   | Hem Energiesprong                        | 2018–19    | Detached houses      | 787                    | Vilogia                                                                                |
| Cs11 | Nuits-Saint-Georges (FR)   | Rue Jean Mermoz, 8                       | 2007–10    | Multi-family         | 2,054                  | SCIC Habitat Bourgogne                                                                 |
| Cs12 | Rambouillet (FR)           | Résidence La Vénérie                     | 2020       | Multi-family         | 13,350                 | Copropriété La Vénérie                                                                 |
| Cs13 | Wattrelos (FR)             | Rénovation EnergieSprong                 | 2020–22    | Terraced houses      | 14,654                 | Vilogia                                                                                |
| Cs14 | Aix-en-Provence (FR)       | Jas de Bouffan                           | 2016–19    | Multi-family         | 56,000                 | ESH Famille & Provence                                                                 |
| Cs15 | Paris (FR)                 | Résidence Desnouettes                    | 2020–21    | Multi-family         | 12,343                 | Copropriété Desnouettes                                                                |
| Cs16 | Saint-Germain-en-Laye (FR) | Ru de Buzot                              | 2016–18    | Multi-family         | 9,138                  | Copropriété Ru de Buzot                                                                |
| Cs17 | Mantes-la-Jolie (FR)       | Tour Neptune                             | 2021–22    | Multi-family         | 6,935                  | Copropriété Neptune                                                                    |
| Cs18 | Bourgoin-Jallieu (FR)      | Résidence Maréchal Leclerc               | 2010–11    | Multi-family         | 2,369                  | Alpes Isère Habitat (formerly Opac 38, Office Public d'Amenagement et de Construction) |
| Cs19 | Plaisir (FR)               | Résidence Gabrielle                      | 2020–22    | Multi-family         | 21,271                 | Copropriété Gabrielle                                                                  |
| Cs20 | Les Clayes-sous-Bois (FR)  | Résidence La Vigneraie                   | 2018–20    | Multi-family         | 30,609                 | Copropriété La Vigneraie                                                               |
| Cs21 | Munich (DE)                | Weiterbauen                              | 2010–14    | Multi-family         | 3,323                  | GWG Städtische Wohnungsgesellschaft München mbH                                        |
| Cs22 | Erfurt (DE)                | Max-Liebermann-Straße, 24                | 2010–11    | Multi-family         | 380                    | private owner(s)                                                                       |
| Cs23 | Munich (DE)                | Parklogen Schwabing (former Funkkaserne) | 2015–17    | Multi-family         | 4,067                  | LIP Ludger Inholte Projektentwicklung GmbH                                             |
| Cs24 | Berlin (DE)                | Newtonprojekt Adlershof                  | 2016–18    | Multi-family         | 1,085                  | Wohneigentümergesellschaft Newtonprojekt                                               |
| Cs25 | Wuppertal (DE)             | Variowohnen Wuppertal                    | 2020       | Student housing      | 4,230                  | Hochschul-Sozialwerk Wuppertal A.ö.R.                                                  |
| Cs26 | Bochum (DE)                | Wohnheim Siepenfeld                      | 2017–19    | Multi-family         | 6,626                  | AKAFÖ Akademisches Förderungswerk A.ö.R.                                               |
| Cs27 | Delf (NL)                  | Van der Lelijstraat                      | 2011–13    | Multi-family         | 9,124                  | Woonbron                                                                               |
| Cs28 | Roosendaal (NL)            | De Kroeven Roosendaal                    | 2010–11    | Terraced houses      | 5,320                  | AlleeWonen                                                                             |
| Cs29 | Utrecht (NL)               | Flat met toekomst (zero-on-the-meter)    | 2017–20    | Multi-family         | 4,000                  | Mitros                                                                                 |
| Cs30 | Venlo (NL)                 | Stadskantoor Venlo                       | 2012–16    | City hall            | 13,500                 | Gemeente Venlo                                                                         |
| Cs31 | Almelo (NL)                | Stadhuis Almelo                          | 2013–15    | City hall            | 20,409                 | Gemeente Almelo                                                                        |
| Cs32 | Madrid (ES)                | Entrepatis Las Carolinas                 | 2018–20    | Multi-family         | 1,404                  | Cooperativa Entrepatis                                                                 |
| Cs33 | San Sebastián (ES)         | Villa Eulietia                           | 2016–17    | Multi-family         | 354                    | private owner(s)                                                                       |
| Cs34 | Girona (ES)                | Carrer Nou                               | 2016–17    | Multi-family         | 678                    | MBD Real Estate Group                                                                  |
| Cs35 | La Coruña (ES)             | Parque Ofimático                         | 2011–16    | Multi-family         | 13,633                 | Sociedade Cooperativa Galega de Viviendas Parque Ofimático                             |
| Cs36 | Pamplona (ES)              | Edificio Thermos                         | 2016–17    | Multi-family         | 2,239                  | Promociones Las Provincias                                                             |
| Cs37 | Barcelona (ES)             | Nena Casas                               | 2017–18    | Detached house       | 300                    | private owner(s)                                                                       |

rating band and the energy performance index before the works, and whether or not the works are part of an urban redevelopment project.

Most cases involve multi-family buildings (62 %), while terraced houses, commercial buildings, and community services are almost equally represented in the remaining cases. Concrete (73 %) and bricks (19 %) are the most common construction materials. Property size varies between 300 and 56,000 square meters of net floor area; the average size is about 8,250 m<sup>2</sup>, while the median is approximately 5,150 m<sup>2</sup>. A couple of properties date back to the first half of the last century, while most of the cases feature properties built during the fifties and the sixties (38 %) and between the seventies and the nineties (24 %).

The third domain focuses on the adoption of energy-efficiency measures. It includes a series of binary variables concerning building cladding and insulation, ventilation, heating and cooling systems, photovoltaic and solar thermal systems, and rainwater harvesting systems.

The common denominator with most of the case studies is the joint intervention on the building envelope – including replacing windows and frames and adding insulation layers – and the heating system. Since that leads to creating a well-insulated home environment, installing a mechanical ventilation system is often featured, too (Fig. 10, upper-left corner). Also relatively standard is the installation of photovoltaic

systems (Fig. 10, center-right panel) and, to a lesser extent, solar thermal systems (Fig. 10, center-left panel). Incidentally, using photovoltaic (PV) energy seems comparatively easier in new construction than in retrofit (installation of PV panels is featured in 82 % of the cases concerning newly built efficient houses and offices – namely, 9 out of 11 – while it is featured in only 31 % of the refurbishment cases – that is to say, 8 out of 26). The opposite holds true regarding solar thermal (ST) energy (ST systems are used in 9 out of 26 refurbishment cases – namely, 35 % – but only in 1 out of 11 new construction cases – that is, 9 %). Nevertheless, the figures above do not control for potential confounders such as case study location, building orientation, roof shape, and so forth. Finally, far less common are cooling and rainwater harvesting systems.

As an effect of the works mentioned above, several cases are characterized by the shift from the D to the B energy rating band and, to a lesser extent, from the D to the A rating band (Fig. 11). There are a few cases where the efficiency works allow just for minor improvements in the energy need, there it can be seen that the energy rating band shifts from C to A, from D to C, and even from E to D. In the retrofit cases, 243 and 212 kWh/m<sup>2</sup> y are the average and the median energy performance index before the works, respectively. Those figures fall to 77 and 75 kWh/m<sup>2</sup> y once the energy refurbishment is done.

**Table 3**

List of the analyzed attributes.

| Domain              | ID   | Variable                                  | Categories                                                                                                                                                                                                               |
|---------------------|------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Business model      | BM * | Business model                            | 1: OSS; 2: EPC; 3: (M)ESA; 4: TKC                                                                                                                                                                                        |
|                     | OW   | Building ownership                        | 1: public body or semi-public organization (including local public and social housing authorities); 2: private non-profit entity (natural persons, housing cooperatives and associations); 3: private for-profit company |
|                     | PD   | Project developer                         | 1: ESCo; 2: construction company; 3: architecture studio, engineering firm, or financial consulting firm                                                                                                                 |
|                     | EP   | Energy provider                           | (binary) 1: involvement of an energy supplier                                                                                                                                                                            |
|                     | OP   | Other players                             | (binary) 1: involvement of actors other than PD and EP                                                                                                                                                                   |
|                     | IM * | Incentive measures                        | (binary) 1: use of subsidies or tax rebates                                                                                                                                                                              |
|                     | TW   | Type of work                              | 1: retrofit; 2: building enlargement and retrofit; 3: new construction                                                                                                                                                   |
|                     | DW   | Duration of the works                     | 1: less than a year; 2: one to three years; 3: more than three and up to ten years                                                                                                                                       |
|                     | IC   | Investment costs                          | 1: <1mln Euros; 2: 1-3mln; 3: 3-5mln; 4: 5-10mln; 5: 10-20mln; 6: >20mln                                                                                                                                                 |
|                     | UC   | Unit costs (per m2 of net floor area)     | 1: <650 Euros/m2; 2: 650–999; 3: 1,000–1,499; 4: 1,500–1,999; 5: 2,000–3,000; 6: >3,000                                                                                                                                  |
| Property features   | ES * | Allocation of energy savings              | 1: nearly equal distribution between PD and OW; 2: most of the savings go to OW                                                                                                                                          |
|                     | PB * | Payback period                            | 1: less than ten years; 2: ten to twenty years; 3: more than twenty years                                                                                                                                                |
|                     | FA   | Property size (net floor area)            | 1: ≤500 m2; 2: 501–2,000; 3: 2,001–8,000; 4: 8,001–12,000; 5: 12,001–20,000; 6: ≥20,000                                                                                                                                  |
|                     | CY   | Construction year                         | 1: earlier than the 1950 s; 2: 1950 s and 1960 s; 3: 1970 s to 1990 s; 4: 2010 s; 5: 2020 s                                                                                                                              |
|                     | BT   | Building typology                         | 1: detached, semi-detached, and terraced house; 2: multi-family building; 3: commercial; 4: other (community services)                                                                                                   |
| Efficiency measures | CM   | Construction material                     | 1: bricks; 2: concrete; 3: wood; 4: steel                                                                                                                                                                                |
|                     | UR   | Urban renewal                             | (binary) 1: the project contributes to the renewal of urban community spaces in the neighborhood                                                                                                                         |
|                     | RBb  | Energy rating band before the works       | 1 to 7: A to G                                                                                                                                                                                                           |
|                     | EPib | Energy performance index before the works | 1: 100–149 kWh/m2 y; 2: 150–162; 3: 163–195; 4: 195–207; 5: 208–229; 6: 230–280; 7: 281–339; 8: 340–359; 9: ≥359                                                                                                         |
|                     | Rba  | Energy rating band after the works        | 1 to 7: A to G                                                                                                                                                                                                           |
|                     | EPIa | Energy performance index after the works  | 1: ≤19 kWh/m2 y; 2: 20–38; 3: 39–52; 4: 53–71; 5: 72–79; 6: 80–91; 7: 92–149; 8: 150–159; 9: ≥159                                                                                                                        |
|                     | CI   | Building cladding and insulation          | (binary) 1: efficiency measures related to cladding and insulation                                                                                                                                                       |
|                     | WF   | Windows and frames                        | (binary) 1: replacement of windows and frames                                                                                                                                                                            |
|                     | HS   | Heating system                            | (binary) 1: replacement of the heating system                                                                                                                                                                            |
|                     | CS   | Cooling system                            | (binary) 1: installation of a cooling system                                                                                                                                                                             |
|                     | VS   | Ventilation system                        | (binary) 1: installation of a mechanical ventilation system                                                                                                                                                              |
|                     | PV   | Photovoltaic                              | (binary) 1: installation of a photovoltaic system                                                                                                                                                                        |
|                     | ST   | Solar thermal                             | (binary) 1: installation of a solar thermal system                                                                                                                                                                       |
|                     | RH   | Rainwater harvesting                      | (binary) 1: installation of a rainwater harvesting system                                                                                                                                                                |

\* Decision attributes

## 5. Results

According to the recognizable rough sets, the OSS BM (Fig. 12, upper panel a) is essentially tied to public ownership of the buildings (OW = 1), while project developers are either construction companies (PD = 2) or, to a lesser extent, consultancy firms (PD = 3). In this regard, it can be seen as a newly added partnership form to the realm of public–private partnerships. Properties undergoing retrofit are concrete (CM = 2), medium-sized (FA = 3), multi-family (BT = 2) outdated buildings, mostly built during the 1950 s and 1960 s (CY = 2). The retrofit works usually take longer than a year but no longer than three years (DW = 2), and, most importantly, the unit costs are low to moderate (UC = 1,2,3), namely, mostly below 650 or in the range of 650 to 999 Euros per square meter.

The intervention strategy (Fig. 12, lower panel b) always involves the addition of insulation layers to the building envelope, almost always the replacement of windows and frames (WF = 1), the installation of a more efficient heating system (HS = 1), and the use of a mechanical extract ventilation system (VS = 1), and seldom the adoption of renewable energy sources to generate electrical power or domestic hot water. It deserves to be pointed out that the previous characterization of the OSS BM refers to most of the cases belonging to it – namely, twelve out of sixteen – but not all. Four additional observations have little in common with the above description; thus, they share little information with the other cases.

The EPC BM (Fig. 13, upper panel a) has a pretty clear characterization as far as building typology and construction material are concerned. All the cases but one are either detached, semi-detached, and terraced brick houses or multi-family concrete buildings. A remarkable

difference with the OSS BM concerns ownership. No more public bodies or semi-public organizations, but private non-profit entities – including housing cooperatives and associations – own most of the properties. Also, using architecture studios, engineering firms, or financial consulting firms as project developers is pretty standard. The rough sets for the EPC BM (Fig. 13, upper panel a) bring other noteworthy specificities to light. Most of the involved properties were not characterized by abysmal energy performance at the beginning, as witnessed by the rating bands C, D, and E before the retrofit projects were carried out (RBb = 3,4,5). It implies that they did not need to undergo deep retrofit. Also, several cases resort to modular, off-site manufactured elements (Cs01, Cs13, and Cs28, for instance), which are then readily deployed and installed rather than cast in place. Perhaps all this helps explain why low unit costs are incurred in several cases (UC = 1).

A further difference with the OSS BM lies in the adopted energy efficiency measures (Fig. 13, lower panel b). Again, almost all cases share the addition of insulation layers, replacement of windows and frames, and substitution of the heating system, often along with the installation of a mechanical ventilation system (VS = 1). Regardless, by contrast with the OSS BM, the use of solar thermal energy is a common trait for a few case studies (ST = 1), and all of them share the installation of photovoltaic panels (PV = 1).

The recognizable rough sets also offer an interesting reading concerning the relationships of the OSS and EPC BMs with the use of incentive measures – especially in the form of grants and subsidies – and with the economic viability of the case studies – as expressed by the payback period when available (Fig. 14). Monetary incentives (IM = 1) are used in more than half of the projects but are more common in the cases belonging to the EPC BM rather than in the OSS BM cases. The use

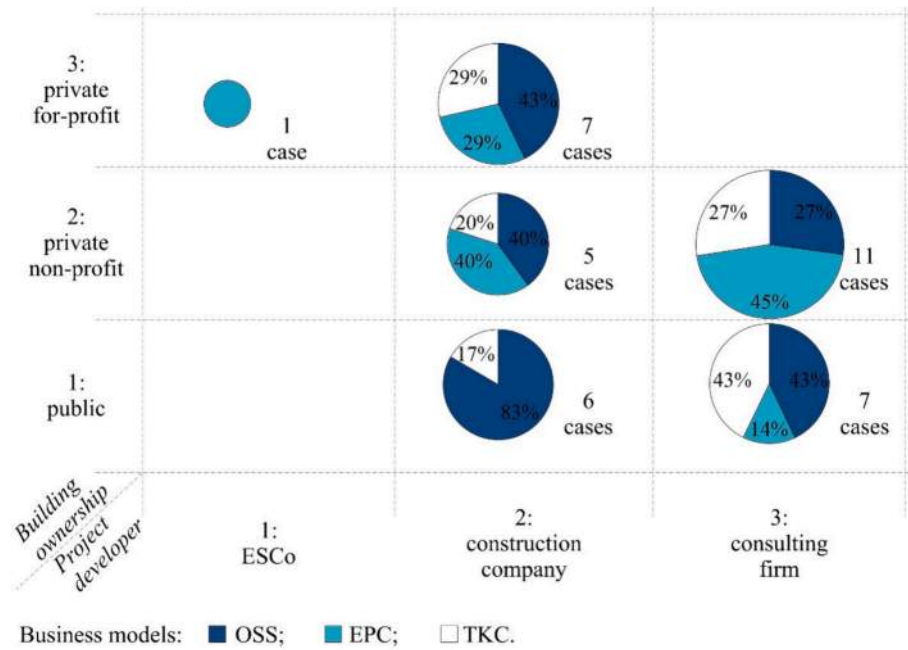


Fig. 9. Breakdown of business models by building ownership and project developer.

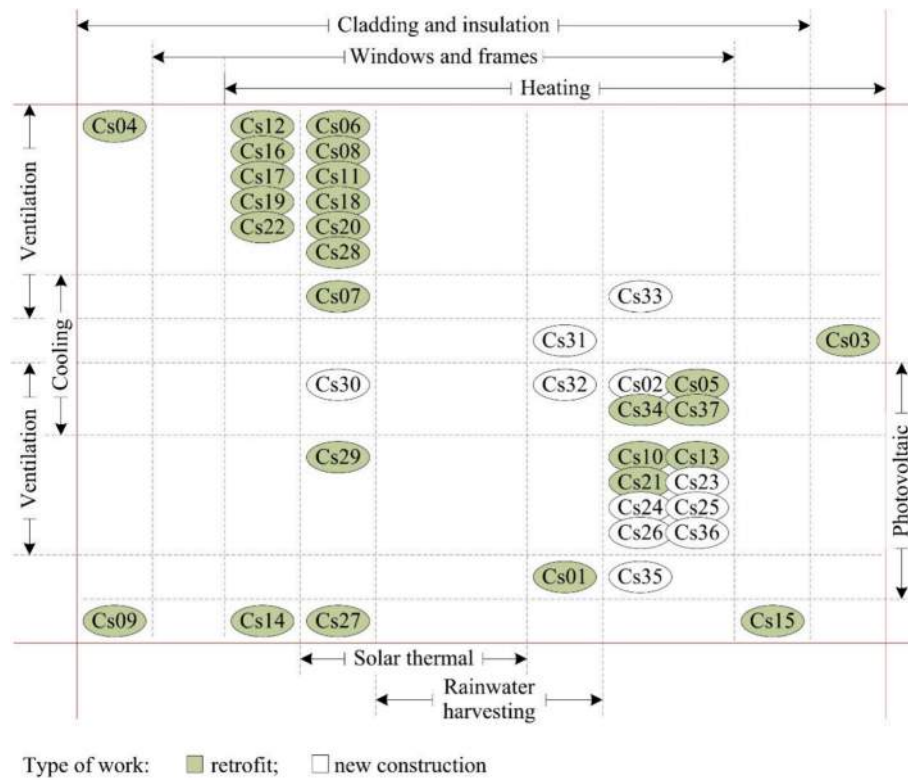


Fig. 10. Combinations of energy efficiency-measures.

of monetary incentives is seemingly independent of the unit investment costs. One would expect the access to grants and subsidies to be distinctive of more expensive projects. On the contrary, it turns out to be ordinary for the case studies where unit investment costs are moderate (in the range of 650 to 999 Euros per square meter, UC = 2) and even low (below 650 Euros per square meter, UC = 1). Surprisingly, incentive measures tend to be less used as unit investment costs increase (for instance, in the range of 1,000 to 1,499 Euros per square meter, UC = 3).

In addition, although data on the actual amount of grants paid is available for barely a third of the case studies, there is no clue that the share of investment costs covered by monetary incentives is somewhat related to the investment costs. The information about the expected payback period, available for only half of the case studies, also suggests a potential decoupling between investment costs and economic viability. Shorter payback periods mainly characterize cheaper projects, regardless of the availability of monetary incentives (see the light blue area in

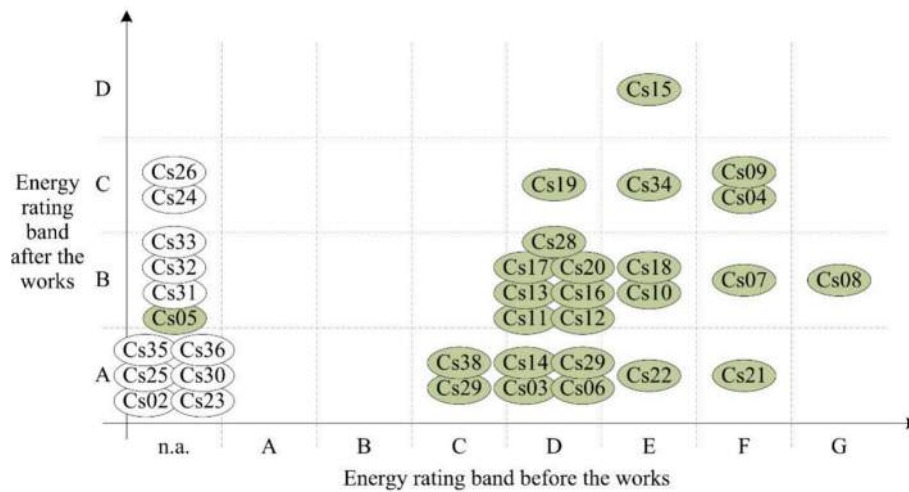


Fig. 11. Changes in the energy rating bands before and after the works.

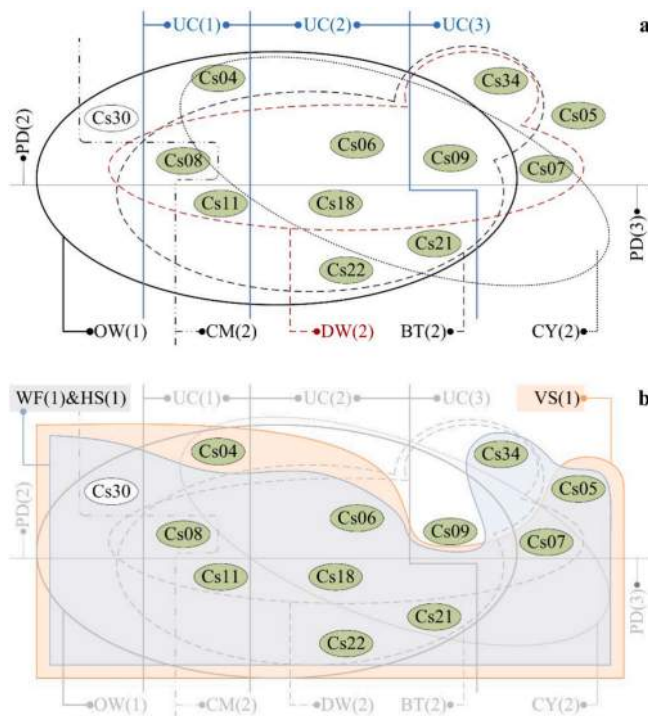


Fig. 12. Rough sets for the One-stop shop business model.

the center-left portion of Fig. 14,  $UC = 1,2 \wedge PB = 1,2$ ). Nonetheless, more extended payback periods are not an exclusive feature of more expensive projects, even with access to grants and subsidies (see the overlap between the dark blue area and the red circle in the center-left portion of Fig. 14,  $UC = 1,2 \wedge IM = 1 \wedge PB = 3$ ).

As far as TKC (Fig. 15) is concerned, a core of attributes related to the specificity of the BM turns out significant: new constructions only, especially small- to mid-sized multi-family buildings completed in a couple of years with just a few exceptions, mostly without broader urban renewal purposes. Some case studies date back to the 2010 s; the others are more recent. Along with construction companies, consulting companies such as architecture studios and engineering firms usually play the role of project developers.

Regarding energy performance, the intervention strategy for the building insulation, windows and frames, and heating system is relatively homogeneous. A mechanical ventilation system is featured in all

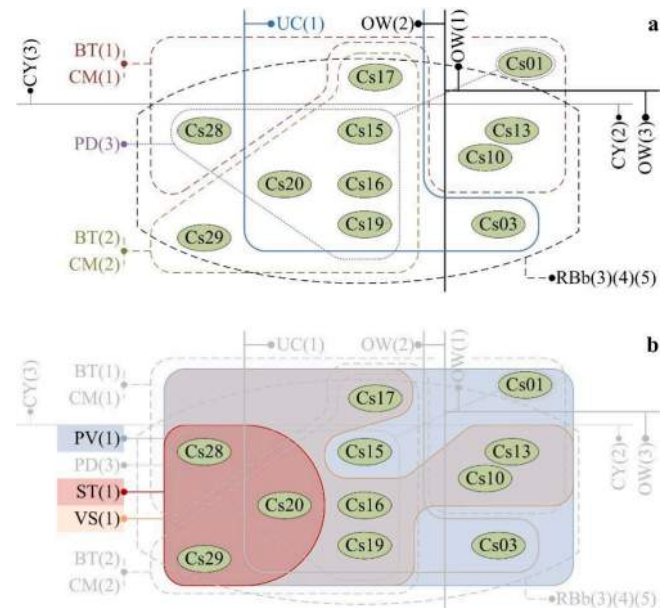


Fig. 13. Rough sets for the Energy performance contracting business model.

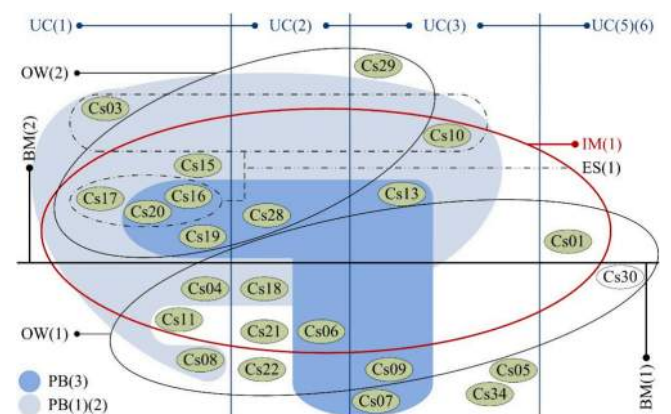


Fig. 14. Rough sets for the OSS and EPC business models as far as incentive measures and payback periods are concerned.

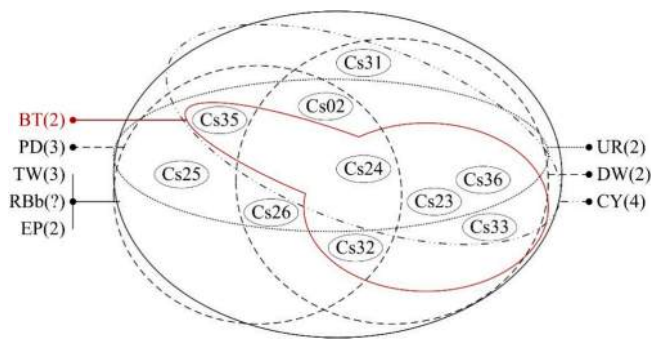


Fig. 15. Rough sets for the Turnkey contract business model.

cases but two, and a cooling system is featured in about half of them. Photovoltaic panels are preferred to solar thermal systems. A rainwater harvesting system is more the exception than the rule.

## 6. Discussion

At the very least, the empirical evidence presented so far raises three questions. The first concerns the characteristics that distinguish the BMs considered here. The second pertains to the profitability profile of the analyzed BMs. The third points back to the primary research question of this study: which attributes arise as success factors, and which ones of the case studies stand up as best practices?

All TKCs involve new constructions, but not all new construction projects resort to the TKC BM. Nonetheless, that was recalled as one of its distinguishing features compared to the OSS BM. Hence, it seems worth asking: where does the boundary between the BMs lie? The question likely matters not only concerning the thin line separating the OSS and TKC BMs but also the blurred boundary between the OSS and EPC BMs. The significance of the question also lies in the fact that some results may differ from the common knowledge on the topic. As seen earlier, there is an almost perfect overlap between the two BMs and the type of ownership. Nearly all the properties of the OSS BM are owned by public bodies or semi-public organizations, the latter ones including local public and social housing authorities. That is at odds with the typical use of OSSs to support renovating small buildings and single-family homes. In turn, many properties of the EPC BM are owned by private non-profit entities, such as natural persons or housing cooperatives and associations. That is at odds with the ordinary use of EPCs to renovate large apartment blocks, especially under the social housing regime. Accordingly, it seems plausible to assume that the choice of the BM is also subject to drivers other than building typology and the public or private nature of property ownership. It may depend on the relationships between the kind of work to be carried out on the property, the goals of the property owner, the extent of the energy-related services to be provided to the users, and whether this implies a short-term involvement of the contractor – namely, for design and construction only – or a long-term participation of the same – that is, for maintenance and management, too.

The economic viability issue also deserves to be considered regarding the analyzed retrofit case studies. Aside from the cases for which the expected payback period is unknown, the break-even is to be expected in the short run for a few projects only, and much more often, it takes more than two or three decades to (almost) get there. That seems to be primarily independent of the cost incurred to develop the investment – as far as the unit cost is concerned, at least – since the issue also affects cases characterized by moderate to low upfront costs. That seems to be even disconnected from the access to incentive measures – monetary incentives, especially – since the issue also affects cases benefiting from substantial grants and subsidies. There may be two suitable explanations for this empirical evidence. On the one hand, several case studies can be primarily considered demonstration projects, wherein technical

feasibility – including energy savings and performance gains – and social acceptability are the primary aspects under scrutiny. The apparent implication is that economic viability is neither the main focus nor the leading concern for the project proponents and developers. On the other hand, many cases do not involve private sector dwellings, thus subject to free market rents; on the contrary, they belong to public or social housing authorities and housing cooperatives or associations, hence being subject to some sort of rent control. The likely implication is that the potential extent of rent increase after retrofit work is also limited, so only part of the energy savings can be translated into higher rents, which – in turn – burdens the projects' economic performance. The considerations above raise a question worth further scrutinizing in future works: whether these kinds of retrofit projects will be able to walk on their feet, in a manner of speaking. To that end, the allocation of energy savings among the involved parties – ownership, contractor, and tenants – seems to be an underrated issue.

As per the last question, attributes such as type of work, nature of the property owner, and time frame of the contractor involvement turn out significant towards the adoption of a specific BM. At the same time, other attributes can be identified as crucial to its success. The extent of the refurbishment work, the adoption of retrofit measures involving as many building elements as possible, and the resulting performance gain are all discerning elements of the analyzed case studies. The topic of cost control and containment is perhaps not among the primary concerns; nevertheless, it cannot be ignored that several case studies show moderate to low unit investment costs. Also, even though grants and subsidies are not determinant towards gaining short payback periods, access to incentive measures still appears essential to support further adoption of innovative BMs.

On the heels of the above reasoning, a few case studies nearly fit the following definition of best practice: a retrofit project wherein the works involve almost all the building elements and most of the systems so as to achieve substantial performance gains, possibly with the use of renewable energy sources, wherein unit costs are nonetheless low, and break-even can be expected in the short run without resorting to public funds. Just one pertinent example (Cs08 for the OSS BM) can be found by comparing the central area of the rough sets for the OSS and EPC BMs (Figs. 12, 13), the upper and lower left corners of the rough sets as far as incentive measures and payback periods are concerned (Fig. 14), and the bottom right panel of the diagram depicting the changes in the energy rating bands before and after the works (Fig. 11). By relaxing the constraints on the attributes, the following, less restrictive definition of best practice fits more case studies: a retrofit project wherein the works involve many building elements and systems so to achieve noticeable performance gains, possibly with the use of renewable energy sources, wherein unit costs are nonetheless low to moderate, and break-even can be expected in short to medium run, even with the use of subsidies and grants. Several pertinent examples (Cs04 and Cs18 for the OSS BM; Cs03, Cs10, and Cs17 – to a lesser extent, also Cs15, Cs16, Cs19, Cs20, and Cs28 – for the EPC BM) can be found by comparing again the central area of the rough sets for the OSS and EPC BMs (Figs. 12, 13), center-left panel of the rough sets as far as incentive measures and payback periods are concerned (Fig. 14), and the right panel of the diagram depicting the changes in the energy rating bands before and after the works (Fig. 11).

## 7. Conclusions

Western economies are facing an age of multiple transitions. Among them, the green transition is of primary concern, demanding action in several key sectors. The construction industry, its whole supply chain, and the real estate market are required to contribute significantly in the short to medium run. To enable these changes – a paradigm shift from business as usual, if you will – the EU countries have adopted a variety of green stimulus policies and measures, from behavioral incentives to in-kind and monetary incentives. This study assumes that the latter ones,

especially the direct cash benefits, have incentivized the rise and growth of innovative entrepreneurial practices, which take the form of emerging business models meant to exploit the pursuit of energy efficiency in the building industry.

This study considers four innovative BMs: OSS, namely, One-stop shop; EPC, which stands for Energy performance contracting; MESA, the acronym for (Managed) energy services agreement; and TKC, short for Turnkey contract. Three of them are applied in 37 case studies across five Central and Western European countries: Belgium, France, Germany, Spain, and The Netherlands. For each case study, the available data belonging to three domains have been gathered: the main features of the adopted BM as far as the first domain is concerned, the characteristics of the properties shape the second domain, and the energy-efficiency measures as far as the third is concerned. The rough set analysis enabled the investigation of the relationships occurring among those attributes.

A few limitations should be borne in mind before generalizing the results. First, the analysis does not encompass some impacts of the relationships between innovative business models and energy efficiency-related works in buildings, such as the social and environmental ones. These aspects may, too, play a significant role in identifying the best practices. In the second place, the empirical findings are dependent on the data coding system. Both qualitative and quantitative variables are translated into categories. Different choices about those categories could result in varying outcomes, with the analysis producing more or fewer sets, meaning there is a trade-off between detail and generalization, better still, between detailed knowledge and information summary. Lastly, data collection is limited to case studies that meet certain conditions as far as the adopted BM is concerned. Therefore, the cases analyzed may not be entirely representative of the efficiency-related measures typically adopted in retrofit and new construction projects, as well as of the building stock in their respective countries and at the EU level.

Concerning the primary results of the study, on the one hand, although the BMs are sometimes characterized by vague boundaries – even fuzzy, so to speak – a few clearly distinguishing features can be identified, particularly concerning the nature of property ownership, building typology, type of work, and extent of the energy-efficiency solutions. On the other hand, incentive measures are extensively adopted, especially direct monetary incentives such as grants and subsidies; still, they are definitely related neither to the unit investment costs incurred while carrying out the projects nor to the payback periods. Nonetheless, there remain open questions as to the financial self-sustainability of the projects.

The latter remark paves the way for some thoughts on policy implications and further developments. Since monetary incentives play a significant role in building energy efficiency, and investment costs are known to increase dramatically when aiming for very high energy performance [34,129], policymakers should address the optimal allocation of grants and subsidies. A crucial question may be posed as follows. Under a given budget constraint, is it more beneficial to concentrate cash incentives on a few investment-intensive, deep retrofit projects, or is it better to subsidize a large number of initiatives that require fewer capital expenditures even though they result in lower energy efficiency gains? By setting the bar very high, EU targets on building energy efficiency seem to favor the first option implicitly. Still, the second option would be prone to speed up the renovation rate of the building stock. In turn, the above issue subtends two research questions and just as many research strands. One approach can be aimed at assessing the two options above from a variety of valuation perspectives: economic viability, considering both property owners' angle and sustainability of public finances; social impacts, including the repercussions on health and comfort in homes and workplaces; and environmental effects. The other approach may aim to evaluate the profitability limits of implementing deep retrofits as, perhaps, not all the building stock deserves a second chance. Possibly, the intended targets of the building energy policy can

also be achieved – sometimes, at least – through demolition and reconstruction, provided tearing down outdated buildings and rebuilding them from scratch prove to outweigh the available retrofit options.

## CRedit authorship contribution statement

**Sergio Copiello:** Writing – original draft, Methodology, Investigation, Formal analysis, Conceptualization, Visualization, Writing – review & editing. **Edda Donati:** Investigation, Formal analysis, Data curation, Writing – review & editing. **Pietro Bonifaci:** Writing – review & editing, Writing – original draft.

## Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Data availability

Data will be made available on request.

## References

- [1] F. Abastante, M. Bottero, S. Greco, I. Lami, Addressing the Location of Undesirable Facilities through the Dominance-based Rough Set Approach, *J. Multi-Criteria Decis. Anal.* 21 (1–2) (2014) 3–23, <https://doi.org/10.1002/mcda.1510>.
- [2] M. Alam, P.X.W. Zou, R.A. Stewart, E. Bertone, O. Sahin, C. Buntine, C. Marshall, Government championed strategies to overcome the barriers to public building energy efficiency retrofit projects, *Sustain. Cities Soc.* 44 (2019) 56–69, <https://doi.org/10.1016/j.scs.2018.09.022>.
- [3] J.M. Allwood, M.F. Ashby, T.G. Gutowski, E. Worrell, Material efficiency: providing material services with less material production, *Philos. Trans. R. Soc. A Math. Phys. Eng. Sci.* 371 (1986) (2013) 20120496, <https://doi.org/10.1098/rsta.2012.0496>.
- [4] H. Amecke, The impact of energy performance certificates: A survey of German home owners, *Energy Policy* 46 (2012) 4–14, <https://doi.org/10.1016/j.enpol.2012.01.064>.
- [5] E. Antonini, D. Longo, V. Gianfrate, S. Copiello, Challenges for public-private partnerships in improving energy efficiency of building sector, *Int. J. Hous. Sci. Appl.* 40 (2) (2016) 99–109.
- [6] F. Ascione, R.F. De Masi, M. Mastellone, S. Ruggiero, G.P. Vanoli, Improving the building stock sustainability in European Countries: A focus on the Italian case, *J. Clean. Prod.* 365 (2022) 132699, <https://doi.org/10.1016/j.jclepro.2022.132699>.
- [7] A. Bagaini, E. Croci, T. Molteni, Boosting energy home renovation through innovative business models: ONE-STOP-SHOP solutions assessment, *J. Clean. Prod.* 331 (2022) 129990, <https://doi.org/10.1016/j.jclepro.2021.129990>.
- [8] V. Beattie, S.J. Smith, Value creation and business models: Refocusing the intellectual capital debate, *Br. Account. Rev.* 45 (4) (2013) 243–254, <https://doi.org/10.1016/j.bar.2013.06.001>.
- [9] C. Becchio, M.C. Bottero, S.P. Corgnati, F. Dell'Anna, Decision making for sustainable urban energy planning: an integrated evaluation framework of alternative solutions for a NZED (Net Zero-Energy District) in Turin, *Land Use Policy* 78 (2018) 803–817, <https://doi.org/10.1016/j.landusepol.2018.06.048>.
- [10] P. Bertoldi, Overview of the European Union policies to promote more sustainable behaviours in energy end-users, in: *Energy and Behaviour*, Elsevier, 2020, pp. 451–477, <https://doi.org/10.1016/B978-0-12-818567-4.00018-1>.
- [11] P. Bertoldi, B. Boza-Kiss, Analysis of barriers and drivers for the development of the ESCO markets in Europe, *Energy Policy* 107 (2017) 345–355, <https://doi.org/10.1016/j.enpol.2017.04.023>.
- [12] P. Bertoldi, B. Boza-Kiss, N. Della Valle, M. Economidou, The role of one-stop shops in energy renovation - a comparative analysis of OSSs cases in Europe, *Energy Buildings* 250 (2021) 111273, <https://doi.org/10.1016/j.enbuild.2021.111273>.
- [13] P. Bertoldi, M. Economidou, EU member states energy efficiency policies for the industrial sector based on the NEEAPs analysis, *ECEEE Industrial Summer Study Proceedings* (2018) 117–127.
- [14] P. Bertoldi, M. Economidou, V. Palermo, B. Boza-Kiss, V. Todeschi, How to finance energy renovation of residential buildings: Review of current and emerging financing instruments in the <scp>EU</scp>. *WIREs, Energy Environ.* 10 (1) (2021), <https://doi.org/10.1002/wene.384>.
- [15] P. Bertoldi, S. Rezessy, Tradable white certificate schemes: fundamental concepts, *Energ. Eff.* 1 (4) (2008) 237–255, <https://doi.org/10.1007/s12053-008-9021-y>.

- [16] P. Bertoldi, S. Rezessy, E. Vine, Energy service companies in European countries: Current status and a strategy to foster their development, *Energy Policy* 34 (14) (2006) 1818–1832, <https://doi.org/10.1016/j.enpol.2005.01.010>.
- [17] V. Bianco, P.M. Sonvilla, P. Gonzalez Reed, A. Villoslada Prado, Business models for supporting energy renovation in residential buildings. The case of the on-bill programs, *Energy Rep.* 8 (2022) 2496–2507, <https://doi.org/10.1016/j.egy.2022.01.188>.
- [18] M.G. Bjørneboe, S. Svendsen, A. Heller, Using a One-Stop-Shop Concept to Guide Decisions When Single-Family Houses Are Renovated, *J. Archit. Eng.* 23 (2) (2017), [https://doi.org/10.1061/\(ASCE\)AE.1943-5568.0000238](https://doi.org/10.1061/(ASCE)AE.1943-5568.0000238).
- [19] N.M.P. Bocken, S.W. Short, P. Rana, S. Evans, A literature and practice review to develop sustainable business model archetypes, *J. Clean. Prod.* 65 (2014) 42–56, <https://doi.org/10.1016/j.jclepro.2013.11.039>.
- [20] Bonifaci, P., & Copiello, S. (2018). Incentive Policies for Residential Buildings Energy Retrofit: An Analysis of Tax Rebate Programs in Italy. In A. Bisello, D. Vettorato, P. Laconte, & S. Costa (Eds.), *Smart and Sustainable Planning for Cities and Regions. SSPCR 2017. Green Energy and Technology* (pp. 267–279). Springer. doi: 10.1007/978-3-319-75774-2\_19.
- [21] Bonifaci, P., Copiello, S., Stanghellini, S. (2016). Assessing policy measures on building energy efficiency through a multi-Actor multi-criteria analysis. *Central Europe Towards Sustainable Building 2016: Innovations for Sustainable Future, CESB 2016*, 1343–1350.
- [22] E. Boo, E. Dallamaggiore, N. Dunphy, J.E. Morrissey, How innovative business models can boost the energy efficient buildings market, *Int. J. Hous. Sci. Appl.* 40 (2) (2016) 73–83.
- [23] F. Boons, F. Lüdeke-Freund, Business models for sustainable innovation: state-of-the-art and steps towards a research agenda, *J. Clean. Prod.* 45 (2013) 9–19, <https://doi.org/10.1016/j.jclepro.2012.07.007>.
- [24] Bottero, M., D'Alpaos, C., & Dell'Anna, F. (2019). Boosting Investments in Buildings Energy Retrofit: The Role of Incentives. In F. Calabrò, L. Della Spina, & C. Bevilacqua (Eds.), *New Metropolitan Perspectives. ISHT 2018. Smart Innovation, Systems and Technologies* (pp. 593–600). Springer. doi: 10.1007/978-3-319-92102-0\_63.
- [25] D. Brown, Business models for residential retrofit in the UK: a critical assessment of five key archetypes, *Energy. Effi.* 11 (6) (2018) 1497–1517, <https://doi.org/10.1007/s12053-018-9629-5>.
- [26] D. Brown, S. Hall, M. Martiskainen, M.E. Davis, Conceptualising domestic energy service business models: A typology and policy recommendations, *Energy Policy* 161 (2022) 112704, <https://doi.org/10.1016/j.enpol.2021.112704>.
- [27] D. Brown, P. Kivimaa, S. Sorrell, An energy leap? Business model innovation and intermediation in the 'Energiesprong' retrofit initiative, *Energy Res. Soc. Sci.* 58 (2019) 101253, <https://doi.org/10.1016/j.erss.2019.101253>.
- [28] S. Brunoro, R. Di Giulio, K. Luigi, D. Jansen, G. Bizzarri, Optimizing Energy Efficiency in Collective Self-Organized Housing: Oriented Business Model and Application, *J. Archit. Eng.* 24 (3) (2018), [https://doi.org/10.1061/\(ASCE\)AE.1943-5568.0000317](https://doi.org/10.1061/(ASCE)AE.1943-5568.0000317).
- [29] Cambridge University Press. (2011). *Cambridge Business English Dictionary*. Cambridge University Press.
- [30] J. Clinton, H. Geller, E. Hirst, Review of Government and Utility Energy Conservation Programs, *Annu. Rev. Energy* 11 (1) (1986) 95–142, <https://doi.org/10.1146/annurev.eg.11.110186.000523>.
- [31] S. Copiello, Leveraging energy efficiency to finance public-private social housing projects, *Energy Policy* 96 (2016) 217–230, <https://doi.org/10.1016/j.enpol.2016.06.003>.
- [32] S. Copiello, Building energy efficiency: A research branch made of paradoxes, *Renew. Sustain. Energy Rev.* 69 (2017) 1064–1076, <https://doi.org/10.1016/j.rser.2016.09.094>.
- [33] S. Copiello, C. Grillenzoni, Economic development and climate change. Which is the cause and which the effect? *Energy Rep.* 6 (2020) 49–59, <https://doi.org/10.1016/j.egy.2020.08.024>.
- [34] S. Copiello, E. Donati, Is investing in energy efficiency worth it? Evidence for substantial price premiums but limited profitability in the housing sector, *Energy. Buildings* 251 (2021) 111371, <https://doi.org/10.1016/j.enbuild.2021.111371>.
- [35] Dasgupta, P., Pattanayak, S., & Smith, V. K. (Eds.). (2018). *Handbook of environmental economics. Volume 4*. Elsevier.
- [36] M. De Rosa, V. Bianco, H. Barth, P. Pereira da Silva, C. Vargas Salgado, F. Pallonetto, Technologies and Strategies to Support Energy Transition in Urban Building and Transportation Sectors, *Energies* 16 (11) (2023) 4317, <https://doi.org/10.3390/en16114317>.
- [37] Donati, E., & Copiello, S. (2023). The One-Stop Shop Business Model for Improving Building Energy Efficiency: Analysis and Applications. In O. Gervasi, B. Murgante, A. M. A. C. Rocha, C. Garau, F. Scorza, Y. Karaca, & C. M. Torre (Eds.), *Computational Science and Its Applications – ICCSA 2023 Workshops. ICCSA 2023. Lecture Notes in Computer Science* (pp. 422–439). Springer. doi: 10.1007/978-3-031-37111-0\_30.
- [38] dos Santos, P., Vicente, E. M., & Ribeiro, E. R. (2011). Reconfiguration methodology of shaded photovoltaic panels to maximize the produced energy. *XI Brazilian Power Electronics Conference*, 700–706. doi: 10.1109/COBEP.2011.6085266.
- [39] N. Dunphy, E. Boo, E. Dallamaggiore, J. Morrissey, Developing a sustainable housing marketplace: New business models to optimize value generation from retrofit, *Int. J. Hous. Sci. Appl.* 40 (3) (2016) 211–221.
- [40] I. Dupper, Munich - re-connecting spaces. Public spaces as environmental infrastructure, functional to the achievement of urban sustainability objectives, *TECHNE – J. Technol. Architect. Environ.* 19 (2020) 34–44, <https://doi.org/10.13128/techn-7935>.
- [41] M. Economidou, V. Todeschi, P. Bertoldi, D. D'Agostino, P. Zangheri, L. Castellazzi, Review of 50 years of EU energy efficiency policies for buildings, *Energy. Buildings* 225 (2020) 110322, <https://doi.org/10.1016/j.enbuild.2020.110322>.
- [42] P. Ensign, S. Roy, T. Brzustowski, Decisions by Key Office Building Stakeholders to Build or Retrofit Green in Toronto's Urban Core, *Sustainability* 13 (12) (2021) 6969, <https://doi.org/10.3390/su13126969>.
- [43] European Commission. (2019). *The European Green Deal*.
- [44] M. Filippini, L.C. Hunt, J. Zorić, Impact of energy policy instruments on the estimated level of underlying energy efficiency in the EU residential sector, *Energy Policy* 69 (2014) 73–81, <https://doi.org/10.1016/j.enpol.2014.01.047>.
- [45] S. Geier, D. Ehrbar, P. Schwehr, Holistic strategies for the retrofit to achieve energy-efficient residential buildings, in: 9th International Masonry Conference, 2014, pp. 1–12.
- [46] H. Geller, P. Harrington, A.H. Rosenfeld, S. Tanishima, F. Unander, Policies for increasing energy efficiency: Thirty years of experience in OECD countries, *Energy Policy* 34 (5) (2006) 556–573, <https://doi.org/10.1016/j.enpol.2005.11.010>.
- [47] E. Gillham, C. Nolden, N. Banks, B. Parrish, T. Moya Mose, K. Sugar, Facilitating application of the energy service concept: Development of an analytical framework, *Energy Policy* 178 (2023) 113584, <https://doi.org/10.1016/j.enpol.2023.113584>.
- [48] C.A. Goldman, N.C. Hopper, J.G. Osborn, Review of US ESCO industry market trends: an empirical analysis of project data, *Energy Policy* 33 (3) (2005) 387–405, <https://doi.org/10.1016/j.enpol.2003.08.008>.
- [49] S. Greco, B. Matarazzo, R. Slowinski, Handling Missing Values in Rough Set Analysis of Multi-attribute and Multi-criteria Decision Problems, *Lect. Notes Comput. Sci.* 1711 (1999) 146–157, [https://doi.org/10.1007/978-3-540-48061-7\\_19](https://doi.org/10.1007/978-3-540-48061-7_19).
- [50] S. Greco, B. Matarazzo, R. Slowinski, Extension Of The Rough Set Approach To Multicriteria Decision Support, *INFOR: Information Syst. Operat. Res.* 38 (3) (2000) 161–195, <https://doi.org/10.1080/03155986.2000.11732407>.
- [51] S. Greco, B. Matarazzo, R. Slowinski, Rough sets theory for multicriteria decision analysis, *Eur. J. Oper. Res.* 129 (1) (2001) 1–47, [https://doi.org/10.1016/S0377-2217\(00\)00167-3](https://doi.org/10.1016/S0377-2217(00)00167-3).
- [52] K. Guo, L. Zhang, Guarantee optimization in energy performance contracting with real option analysis, *J. Clean. Prod.* 258 (2020) 120908, <https://doi.org/10.1016/j.jclepro.2020.120908>.
- [53] A. Haines, P. Scheelbeek, European Green Deal: a major opportunity for health improvement, *Lancet* 395 (10233) (2020) 1327–1329, [https://doi.org/10.1016/S0140-6736\(20\)30109-4](https://doi.org/10.1016/S0140-6736(20)30109-4).
- [54] S. Hall, M. Workman, J. Hardy, C. Mazur, J. Anable, M. Powell, S.M. Wagner, Doing business model innovation for sustainability transitions — Bringing in strategic foresight and human centred design, *Energy Res. Soc. Sci.* 90 (2022) 102685, <https://doi.org/10.1016/j.erss.2022.102685>.
- [55] Hiller, C., Hasselaar, E., & Gervind, P. (2014). Tenant involvement in renovation for low energy performance. *World SB14 - Sustainable Building: Results - Conference Proceedings*, 1–28.
- [56] T.S.M. Hojem, K.H. Sørensen, V.A. Lagesen, Designing a 'green' building: expanding ambitions through social learning, *Build. Res. Inf.* 42 (5) (2014) 591–601, <https://doi.org/10.1080/09613218.2014.905168>.
- [57] T. Hoppe, Adoption of innovative energy systems in social housing: Lessons from eight large-scale renovation projects in The Netherlands, *Energy Policy* 51 (2012) 791–801, <https://doi.org/10.1016/j.enpol.2012.09.026>.
- [58] Iea-Retd. (2013). *Business Models for Renewable Energy in the Built Environment*. Routledge. doi: 10.4324/9780203083178.
- [59] O. Iwaka, S. Liu, A. Shukla, D. Yan, Energy and behaviour at home: A review of intervention methods and practices, *Energy Res. Soc. Sci.* 57 (2019) 101238, <https://doi.org/10.1016/j.erss.2019.101238>.
- [60] Jenkins, K. E. H., & Hopkins, D. (2018). *Transitions in Energy Efficiency and Demand*. Routledge. doi: 10.4324/9781351127264.
- [61] M. Kanellakis, G. Martinopoulos, T. Zachariadis, European energy policy—A review, *Energy Policy* 62 (2013) 1020–1030, <https://doi.org/10.1016/j.enpol.2013.08.008>.
- [62] F. Kern, P. Kivimaa, M. Martiskainen, Policy packaging or policy patching? The development of complex energy efficiency policy mixes, *Energy Res. Soc. Sci.* 23 (2017) 11–25, <https://doi.org/10.1016/j.erss.2016.11.002>.
- [63] N. Kerr, A. Gouldson, J. Barrett, The rationale for energy efficiency policy: Assessing the recognition of the multiple benefits of energy efficiency retrofit policy, *Energy Policy* 106 (2017) 212–221, <https://doi.org/10.1016/j.enpol.2017.03.053>.
- [64] S. Kiluk, Dynamic classification system in large-scale supervision of energy efficiency in buildings, *Appl. Energy* 132 (2014) 1–14, <https://doi.org/10.1016/j.apenergy.2014.06.054>.
- [65] S. Klinke, The determinants for adoption of energy supply contracting: Empirical evidence from the Swiss market, *Energy Policy* 118 (2018) 221–231, <https://doi.org/10.1016/j.enpol.2018.03.055>.
- [66] Konstantinou, T., & Heesbeen, C. (2022). Industrialized renovation of the building envelope: realizing the potential to decarbonize the European building stock. In *Rethinking Building Skins* (pp. 257–283). Elsevier. doi: 10.1016/B978-0-12-822477-9.00008-5.
- [67] M. Kryszkiewicz, Rough set approach to incomplete information systems, *Inf. Sci.* 112 (1–4) (1998) 39–49, [https://doi.org/10.1016/S0020-0255\(98\)10019-1](https://doi.org/10.1016/S0020-0255(98)10019-1).
- [68] J. Kurnitskij, K. Kuusk, T. Tark, A. Uutar, T. Kalamees, E. Pikas, Energy and investment intensity of integrated renovation and 2030 cost optimal savings,

- Energ. Buildings 75 (2014) 51–59, <https://doi.org/10.1016/j.enbuild.2014.01.044>.
- [69] P. Lee, T. Ip Lam, R. Jye Dzeng, Current market development of energy performance contracting, *J. Prop. Invest. Financ.* 32 (4) (2014) 371–395, <https://doi.org/10.1108/JPIF-01-2014-0003>.
- [70] P. Lee, P.T.I. Lam, W.L. Lee, Risks in Energy Performance Contracting (EPC) projects, *Energ. Buildings* 92 (2015) 116–127, <https://doi.org/10.1016/j.enbuild.2015.01.054>.
- [71] L. Lei, W. Chen, B. Wu, C. Chen, W. Liu, A building energy consumption prediction model based on rough set theory and deep learning algorithms, *Energ. Buildings* 240 (2021) 110886, <https://doi.org/10.1016/j.enbuild.2021.110886>.
- [72] Y. Lu, N. Zhang, J. Chen, A behavior-based decision-making model for energy performance contracting in building retrofit, *Energ. Buildings* 156 (2017) 315–326, <https://doi.org/10.1016/j.enbuild.2017.09.088>.
- [73] E. Lucas, P. Marthe, G. Stephane, O.-M. Claire, B. Marion, European market structure for integrated home renovation support service: Scope and comparison of the different kind of one stop shops, *AIMS Energy* 11 (5) (2023) 846–877, <https://doi.org/10.3934/energy.2023041>.
- [74] Y. Ma, T.F. Thornton, D. Mangalagiu, J. Lan, D. Hestad, E.A. Cappello, S. Van der Leeuw, Co-creation, co-evolution and co-governance: understanding green businesses and urban transformations, *Clim. Change* 160 (4) (2020) 621–636, <https://doi.org/10.1007/s10584-019-02541-3>.
- [75] Madsen, R., Lindgren, P., & Durst, S. (2022). Business Model Archetypes. A Systematic Literature Review. 2022 25th International Symposium on Wireless Personal Multimedia Communications (WPMC), 128–133. doi: 10.1109/WPMC55625.2022.10014802.
- [76] C. Maduta, G. Melica, D. D'Agostino, P. Bertoldi, Towards a decarbonised building stock by 2050: The meaning and the role of zero emission buildings (ZEBs) in Europe, *Energ. Strat. Rev.* 44 (2022) 101009, <https://doi.org/10.1016/j.esr.2022.101009>.
- [77] C. Maduta, D. D'Agostino, S. Tsemekidi-Tzeiranaki, L. Castellazzi, G. Melica, P. Bertoldi, Towards climate neutrality within the European Union: Assessment of the Energy Performance of Buildings Directive implementation in Member States, *Energ. Buildings* 301 (2023) 113716, <https://doi.org/10.1016/j.enbuild.2023.113716>.
- [78] J. Magretta, Why Business Models Matter, *Harv. Bus. Rev.* 80 (5) (2002) 86–92.
- [79] A. Magrini, G. Lentini, S. Cuman, A. Bodrato, L. Marengo, From nearly zero energy buildings (NZE) to positive energy buildings (PEB): The next challenge - The most recent European trends with some notes on the energy analysis of a forerunner PEB example, *Develop. Build. Environ.* 3 (2020) 100019, <https://doi.org/10.1016/j.dibe.2020.100019>.
- [80] K. Mahapatra, L. Gustavsson, T. Haavik, S. Aabrekk, S. Svendsen, L. Vanhoutteghem, S. Paiho, M. Ala-Juusela, Business models for full service energy renovation of single-family houses in Nordic countries, *Appl. Energy* 112 (2013) 1558–1565, <https://doi.org/10.1016/j.apenergy.2013.01.010>.
- [81] M. Manfren, M. Sibilla, L. Tronchin, Energy Modelling and Analytics in the Built Environment—A Review of the Role for Energy Transitions in the Construction Sector, *Energies* 14 (3) (2021) 679, <https://doi.org/10.3390/en14030679>.
- [82] Markandya, A., Labandeira, X., & Ramos, A. (2015). Policy Instruments to Foster Energy Efficiency. In A. Ansuategi, J. Delgado, & I. Galarraza (Eds.), *Green Energy and Efficiency* (pp. 93–110). Springer. doi: 10.1007/978-3-319-03632-8\_4.
- [83] Z. Mayer, R. Volk, F. Schultmann, Analysis of financial benefits for energy retrofits of owner-occupied single-family houses in Germany, *Build. Environ.* 211 (2022) 108722, <https://doi.org/10.1016/j.buildenv.2021.108722>.
- [84] A. Merna, N. Smith, Project managers and the use of turnkey contracts, *Int. J. Proj. Manag.* 8 (3) (1990) 183–189, [https://doi.org/10.1016/0263-7863\(90\)90021-3](https://doi.org/10.1016/0263-7863(90)90021-3).
- [85] C. Monsberger, B. Fina, H. Auer, Profitability of Energy Supply Contracting and Energy Sharing Concepts in a Neighborhood Energy Community: Business Cases for Austria, *Energies* 14 (4) (2021) 921, <https://doi.org/10.3390/en14040921>.
- [86] H. Muyingo, Organizational Challenges in the Adoption of Building Applied Photovoltaics in the Swedish Tenant-Owner Housing Sector, *Sustainability* 7 (4) (2015) 3637–3664, <https://doi.org/10.3390/su7043637>.
- [87] J. Nässén, J. Holmberg, Energy efficiency—a forgotten goal in the Swedish building sector? *Energy Policy* 33 (8) (2005) 1037–1051, <https://doi.org/10.1016/j.enpol.2003.11.004>.
- [88] P. Nijkamp, M. van der Burch, G. Vindigni, A Comparative Institutional Evaluation of Public-Private Partnerships in Dutch Urban Land-use and Revitalisation Projects, *Urban Stud.* 39 (10) (2002) 1865–1880, <https://doi.org/10.1080/0042098022000002993>.
- [89] M. Norouzi, M. Chäfer, L.F. Cabeza, L. Jiménez, D. Boer, Circular economy in the building and construction sector: A scientific evolution analysis, *J. Build. Eng.* 44 (2021) 102704, <https://doi.org/10.1016/j.job.2021.102704>.
- [90] S. Olsson, T. Malmqvist, M. Glaumann, Managing Sustainability Aspects in Renovation Processes: Interview Study and Outline of a Process Model, *Sustainability* 7 (6) (2015) 6336–6352, <https://doi.org/10.3390/su7066336>.
- [91] A. Osterwalder, Y. Pigneur, C.L. Tucci, Clarifying Business Models: Origins, Present, and Future of the Concept, *Commun. Assoc. Inf. Syst.* 16 (2005), <https://doi.org/10.17705/1CAIS.01601>.
- [92] S. Paiho, R. Abdurafikov, H. Hoang, J. Kuusisto, An analysis of different business models for energy efficient renovation of residential districts in Russian cold regions, *Sustain. Cities Soc.* 14 (2015) 31–42, <https://doi.org/10.1016/j.scs.2014.07.008>.
- [93] G. Pardalis, K. Mahapatra, G. Bravo, B. Mainali, Swedish House Owners' Intentions Towards Renovations: Is there a Market for One-Stop-Shop? *Buildings* 9 (7) (2019) 164, <https://doi.org/10.3390/buildings9070164>.
- [94] G. Pardalis, K. Mahapatra, B. Mainali, Comparing public- and private-driven one-stop-shops for energy renovations of residential buildings in Europe, *J. Clean. Prod.* 365 (2022) 132683, <https://doi.org/10.1016/j.jclepro.2022.132683>.
- [95] Z. Pawlak, Rough sets, *Int. J. Comput. Inform. Sci.* 11 (5) (1982) 341–356, <https://doi.org/10.1007/BF01001956>.
- [96] Pawlak, Z. (1991). *Rough Sets. Theoretical Aspects of Reasoning about Data*. Springer Netherlands. doi: 10.1007/978-94-011-3534-4.
- [97] Z. Pawlak, Vagueness and Uncertainty: A Rough Set Perspective, *Comput. Intell.* 11 (2) (1995) 227–232, <https://doi.org/10.1111/j.1467-8640.1995.tb00029.x>.
- [98] Z. Pawlak, Rough set approach to knowledge-based decision support, *Eur. J. Oper. Res.* 99 (1) (1997) 48–57, [https://doi.org/10.1016/S0377-2217\(96\)00382-7](https://doi.org/10.1016/S0377-2217(96)00382-7).
- [99] Z. Pawlak, Rough Set Theory and its Applications to Data Analysis, *Cybern. Syst.* 29 (7) (1998) 661–688, <https://doi.org/10.1080/019697298125470>.
- [100] Z. Pawlak, A. Skowron, Rudiments of rough sets, *Inf. Sci.* 177 (1) (2007) 3–27, <https://doi.org/10.1016/j.ins.2006.06.003>.
- [101] Z. Pawlak, R. Slowinski, Rough set approach to multi-attribute decision analysis, *Eur. J. Oper. Res.* 72 (3) (1994) 443–459, [https://doi.org/10.1016/0377-2217\(94\)90415-4](https://doi.org/10.1016/0377-2217(94)90415-4).
- [102] M. Pellegrino, Les acteurs du bâtiment face au défi de la massification de la rénovation énergétique très performante: le cas de la démarche Energiesprong aux Pays-Bas et en France, *Revue Internationale D'urbanisme* 8 (2019) 1–32.
- [103] M. Pellegrino, C. Wernert, A. Chartier, Social Housing Net-Zero Energy Renovations With Energy Performance Contract: Incorporating Occupants' Behaviour, *Urban Plan.* 7 (2) (2022) 5–19, <https://doi.org/10.17645/up.v7i2.5029>.
- [104] D.A. Pohoryles, C. Maduta, D.A. Bournas, L.A. Kouris, Energy performance of existing residential buildings in Europe: A novel approach combining energy with seismic retrofitting, *Energ. Buildings* 223 (2020) 110024, <https://doi.org/10.1016/j.enbuild.2020.110024>.
- [105] Prędk, B., Slowinski, R., Stefanowski, J., Susmaga, R., & Wilk, S. (1998). ROSE - Software Implementation of the Rough Set Theory. In L. Polkowski & A. Skowron (Eds.), *Rough Sets and Current Trends in Computing. RSCTC 1998. Lecture Notes in Computer Science* (pp. 605–608). Springer. doi: 10.1007/3-540-69115-4\_85.
- [106] Prędk, B., & Wilk, S. (1999). Rough set based data exploration using ROSE system. In Z. W. Raś & A. Skowron (Eds.), *Foundations of Intelligent Systems. ISMIS 1999. Lecture Notes in Computer Science* (pp. 172–180). Springer. doi: 10.1007/BFb0095102.
- [107] Prégardien, M., & Marique, A.-F. (2019). Energy retrofitting of building with a view to heritage values: The case of modernist buildings of ULiège in Belgium. *Proceedings of the 14th Conference on Advanced Building Skins*, 1–10.
- [108] A. Ramos, A. Gago, X. Labandeira, P. Linares, The role of information for energy efficiency in the residential sector, *Energy Econ.* 52 (2015) S17–S29, <https://doi.org/10.1016/j.eneco.2015.08.022>.
- [109] T. Shang, K. Zhang, P. Liu, Z. Chen, A review of energy performance contracting business models: Status and recommendation, *Sustain. Cities Soc.* 34 (2017) 203–210, <https://doi.org/10.1016/j.scs.2017.06.018>.
- [110] L. Shen, B. He, L. Jiao, X. Song, X. Zhang, Research on the development of main policy instruments for improving building energy-efficiency, *J. Clean. Prod.* 112 (2016) 1789–1803, <https://doi.org/10.1016/j.jclepro.2015.06.108>.
- [111] Q. Shi, Y. Yan, J. Zuo, T. Yu, Objective conflicts in green buildings projects: A critical analysis, *Build. Environ.* 96 (2016) 107–117, <https://doi.org/10.1016/j.buildenv.2015.11.016>.
- [112] R. Slowinski, Rough set learning of preferential attitude in multi-criteria decision making, *Lect. Notes Comput. Sci.* 689 (1993) 642–651, [https://doi.org/10.1007/3-540-56804-2\\_60](https://doi.org/10.1007/3-540-56804-2_60).
- [113] R. Slowinski, J. Stefanowski, Rough classification in incomplete information systems, *Math. Comput. Model.* 12 (10–11) (1989) 1347–1357, [https://doi.org/10.1016/0895-7177\(89\)90373-7](https://doi.org/10.1016/0895-7177(89)90373-7).
- [114] S. Sorrell, The economics of energy service contracts, *Energy Policy* 35 (1) (2007) 507–521, <https://doi.org/10.1016/j.enpol.2005.12.009>.
- [115] S. Stanghellini, S. Copiello, Urban Models in Italy: Partnership Forms, Territorial Contexts, Tools, Results, in: R. Dalla Longa (Ed.), *Urban Models and Public-Private Partnership*, Springer, 2011, pp. 47–130, [https://doi.org/10.1007/978-3-540-70508-6\\_3](https://doi.org/10.1007/978-3-540-70508-6_3).
- [116] G. Stankuniene, Energy Saving in Households: A Systematic Literature Review, *Europ. J. Interdiscipl. Stud.* 13 (1) (2021) 45–57, <https://doi.org/10.24818/ejis.2021.04>.
- [117] E. Stuart, J.P. Carvallo, P.H. Larsen, C.A. Goldman, D. Gilligan, Understanding recent market trends of the US ESCO industry, *Energ. Eff.* 11 (6) (2018) 1303–1324, <https://doi.org/10.1007/s12053-018-9633-9>.
- [118] D.J. Teece, Business Models, Business Strategy and Innovation, *Long Range Plan.* 43 (2–3) (2010) 172–194, <https://doi.org/10.1016/j.lrp.2009.07.003>.
- [119] M. Tingey, J. Webb, D. Van der Horst, Housing retrofit: six types of local authority energy service models, *Build. Cities* 2 (1) (2021) 518, <https://doi.org/10.5334/bc.104>.
- [120] H. Tommerup, S. Svendsen, Energy savings in Danish residential building stock, *Energ. Buildings* 38 (6) (2006) 618–626, <https://doi.org/10.1016/j.enbuild.2005.08.017>.
- [121] E. Trippel, How green is green enough? The changing landscape of financing a sustainable European economy, *ERA Forum* 21 (2) (2020) 155–170, <https://doi.org/10.1007/s12027-020-00611-z>.
- [122] L. Tronchin, M. Manfren, B. Nastasi, Energy efficiency, demand side management and energy storage technologies – A critical analysis of possible paths of integration in the built environment, *Renew. Sustain. Energy Rev.* 95 (2018) 341–353, <https://doi.org/10.1016/j.rser.2018.06.060>.

- [123] G. Trotta, J. Spangenberg, S. Lorek, Energy efficiency in the residential sector: identification of promising policy instruments and private initiatives among selected European countries, *Energ. Effi.* 11 (8) (2018) 2111–2135, <https://doi.org/10.1007/s12053-018-9739-0>.
- [124] M. Villca-Pozo, J.P. Gonzales-Bustos, Tax incentives to modernize the energy efficiency of the housing in Spain, *Energy Policy* 128 (2019) 530–538, <https://doi.org/10.1016/j.enpol.2019.01.031>.
- [125] E. Vine, An international survey of the energy service company (ESCO) industry, *Energy Policy* 33 (5) (2005) 691–704, <https://doi.org/10.1016/j.enpol.2003.09.014>.
- [126] S. Wan, Y. Liu, G. Ding, G. Runeson, M. Er, Risk allocation for energy performance contract from the perspective of incomplete contract: a study of commercial buildings in China, *Int. J. Clim. Change Strategies Manage.* 15 (4) (2023) 457–478, <https://doi.org/10.1108/IJCCSM-11-2021-0130>.
- [127] M. Weißenberger, W. Jensch, W. Lang, The convergence of life cycle assessment and nearly zero-energy buildings: The case of Germany, *Energ. Buildings* 76 (2014) 551–557, <https://doi.org/10.1016/j.enbuild.2014.03.028>.
- [128] S. Wolf, J. Teitge, J. Mielke, F. Schütze, C. Jaeger, The European Green Deal — More Than Climate Neutrality, *Intereconomics* 56 (2) (2021) 99–107, <https://doi.org/10.1007/s10272-021-0963-z>.
- [129] A. Zalejska-Jonsson, H. Lind, S. Hintze, Low-energy versus conventional residential buildings: cost and profit, *J. Europ. Real Estate Res.* 5 (3) (2012) 211–228, <https://doi.org/10.1108/17539261211282064>.
- [130] P. Zangheri, R. Armani, M. Pietrobon, L. Pagliano, Identification of cost-optimal and NZEB refurbishment levels for representative climates and building typologies across Europe, *Energ. Effi.* 11 (2) (2018) 337–369, <https://doi.org/10.1007/s12053-017-9566-8>.
- [131] P. Zangheri, D. D'Agostino, R. Armani, P. Bertoldi, Review of the Cost-Optimal Methodology Implementation in Member States in Compliance with the Energy Performance of Buildings Directive, *Buildings* 12 (9) (2022) 1482, <https://doi.org/10.3390/buildings12091482>.
- [132] X. Zhao, W. Pan, The characteristics and evolution of business model for green buildings: a bibliometric approach, *Eng. Constr. Archit. Manag.* 29 (10) (2022) 4241–4266, <https://doi.org/10.1108/ECAM-08-2020-0657>.
- [133] X. Zhao, W. Pan, W. Lu, Business model innovation for delivering zero carbon buildings, *Sustain. Cities Soc.* 27 (2016) 253–262, <https://doi.org/10.1016/j.scs.2016.03.013>.
- [134] C. Zott, R. Amit, Business Model Design: An Activity System Perspective, *Long Range Plan.* 43 (2–3) (2010) 216–226, <https://doi.org/10.1016/j.lrp.2009.07.004>.